

LED


SURFACE MOUNT PANEL

1X1, 1X2

CCT SELECT



1x1

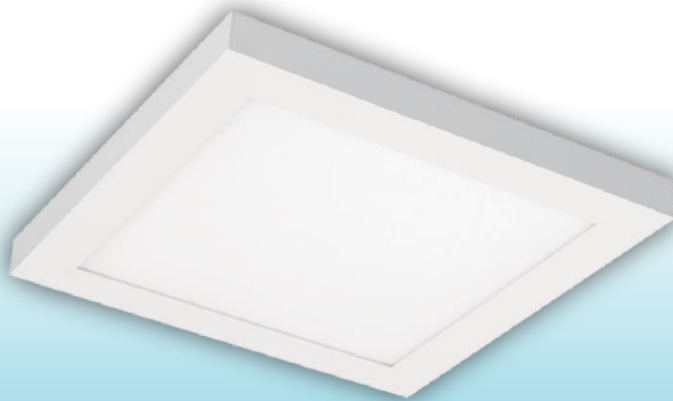

1x2



**CCT SWITCH
ON THE BACK**



SPECIFICATIONS

ELECTRICAL

MODEL	DESCRIPTION	POWER	LUMEN	EFFICACY	INPUT VOLTS	DIMMABLE	FREQUENCY	LIFETIME	POWER FACTOR
GT24025	LED18W1X1PANEL/5CCT/D	18W	1500	100	120V	YES	60Hz	50,000	<0.9
GT24027	LED22W1X2PANEL/5CCT/D	22W	2100	91	120V	YES	60Hz	50,000	<0.9


PHOTOMETRIC

MODEL	COLOR (CCT)	TEMP	CRI	FINISH	DAMP LOCATION	UL LISTED	ENERGY STAR
GT24025	2700K/3000K/3500K/4000K/5000K	WARM/SOFT/NATURAL/COOL/BRIGHT	80	WHITE	YES	YES	YES
GT24027	2700K/3000K/3500K/4000K/5000K	WARM/SOFT/NATURAL/COOL/BRIGHT	80	WHITE	YES	YES	YES

GENERAL

DIMENSIONS

1X1

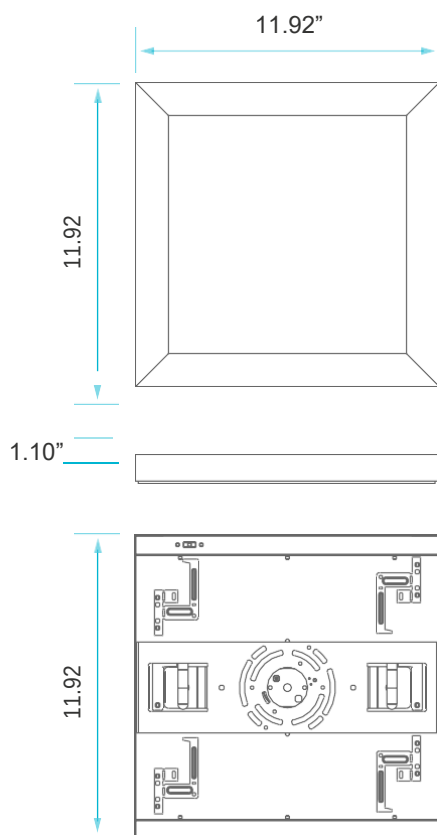

1X2

