



LED-CL03C



LM79

LM80

Product Description

- ▶ High-pressure die cast aluminum housing with powder-coated finish for corrosion resistance
- ▶ High quality polycarbonate (PC) hood optimizes lumen output
- ▶ Heat-resistant and gas tight rubber seal for high IP rating
- ▶ IP Class: IP54

Application


Parks, Shopping Malls, Courtyards, Historic Areas, Pedestrian path etc.



| Input Power | Delivered Lumens (5000K) | ETL | DLC | LM79 | Projected L70 (Hours) | Input Voltage | CCT | CRI | Power Factor | THD | Installation |
|-------------|--------------------------|-----|---------|------|-----------------------|---------------------|------------|-----|--------------|------|--------------------------------------|
| 40W | 3,400LM | ✓ | | | | 120-277V 50/60HZ | 2700-6500K | >80 | >0.92 | <15% | Φ 2.36-2.95" (Φ 60-75) Round pole |
| 60W | 5,100LM | ✓ | Pending | | | | | | | | |
| 80W | 6,800LM | ✓ | | | | | | | | | |
| 100W | 8,500LM | ✓ | | | | | | | | | |

More models and wattages will be DLC listed, please visit www.cnygreenteam.com to check the latest DLC status

Inch(mm)

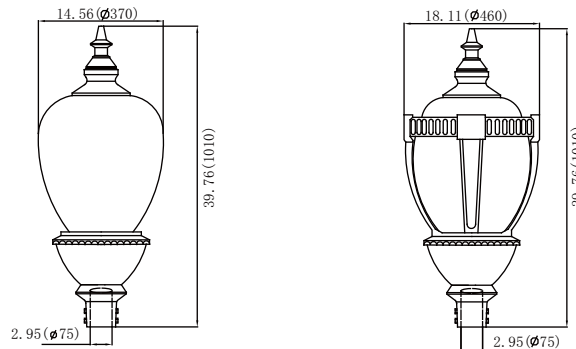

Distribution Curve Flux

