

PRODUCT SPECIFICATION

DESCRIPTION-----150W LED Flood Light



LM79
LM80



● Features




- | | | | |
|--|---|---|---|
| <p>①
Energy-saving
Saving more than 80% power Energy than traditional lamps</p> | <p>②
Eco-friendly
No UV/IR, Safe solid Light source, No Mecury & lead.</p> | <p>③
Easy to use
Instant Start , No Flicker ,Free main-tance</p> | <p>④
Long life-span
More than 80,000 hours long lifespan. Low light failure.</p> |
|--|---|---|---|

● Technical Parameter

Model	GT-FL150W
Power	150W
Voltage	AC90-277V OR 347V
Working Frequency	50-60HZ
Power Efficiency	>95%
Luminous Flux	13,500LM
Power Factor	>0.90
Color Temperature	WW: 2700 - 3300K NW:4000 - 4500K CW: 5000 - 5500K
CRI	Ra \geq 75
Beam Angle	130°
Working Temperature	-30 to +60 °C
IP Rate	IP65
Life-span	50,000hrs life, 5 Years Warranty


● Lux Parameter

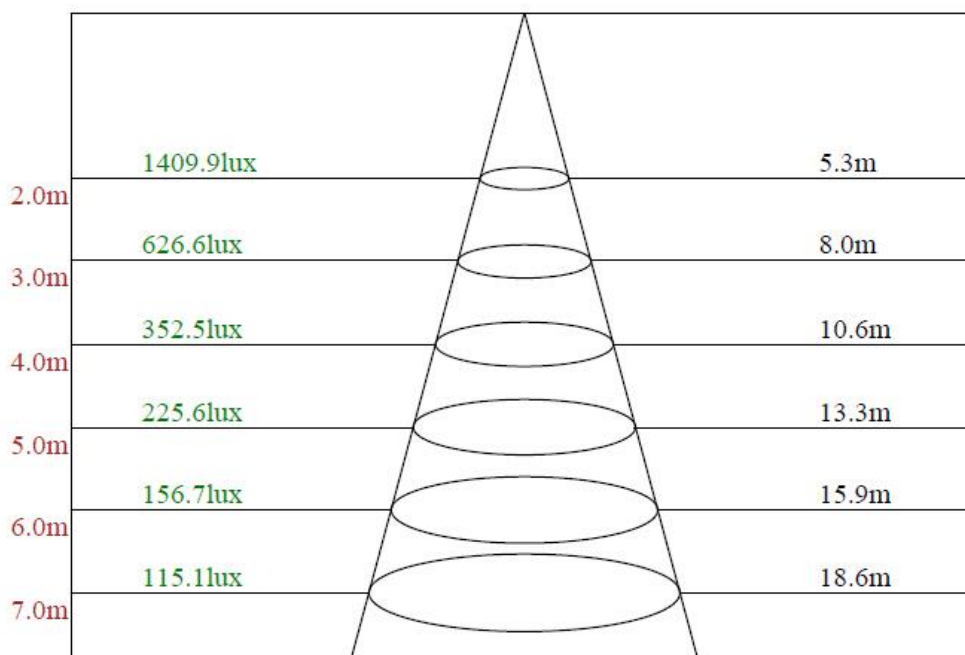


Beam angle of C270plane105.99

● Light Distribution Curve [Unit:cd]


Light Distribution Curve [Unit: cd]

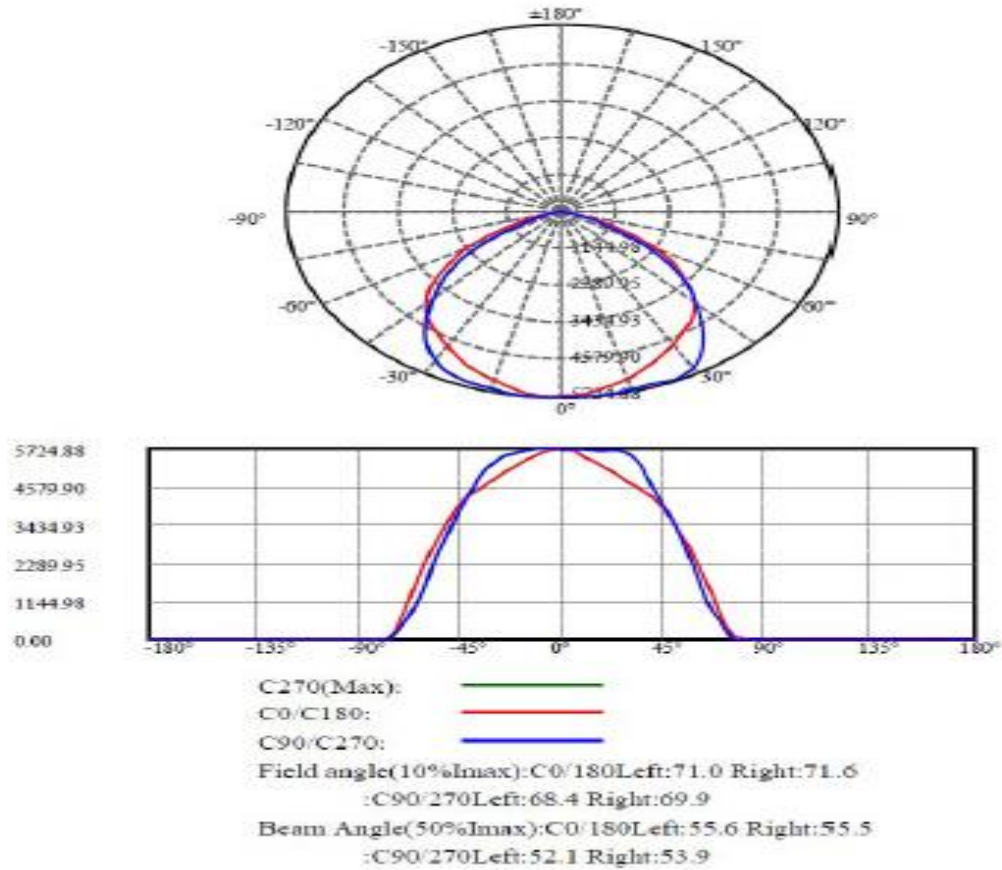


● Dimension

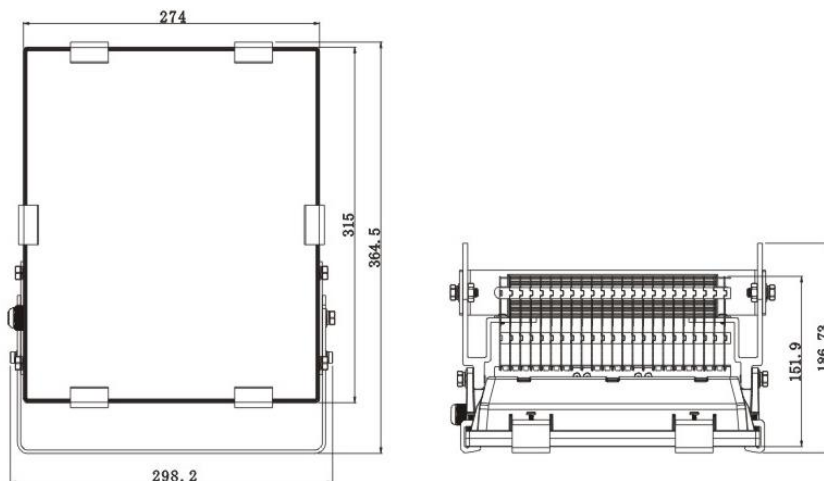

● Product Details

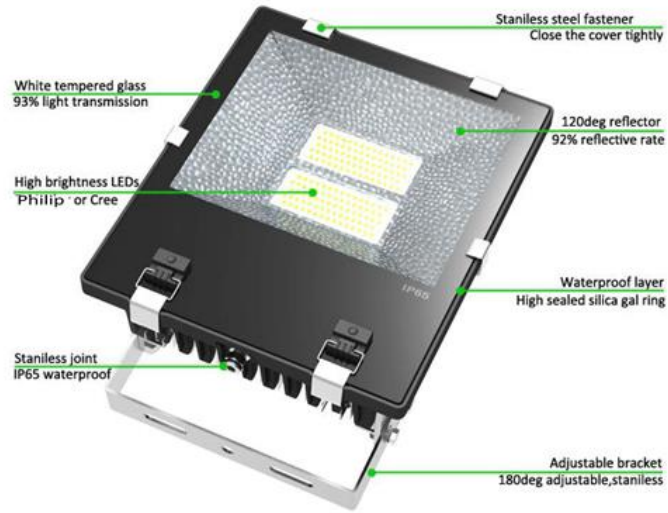


● Product Package

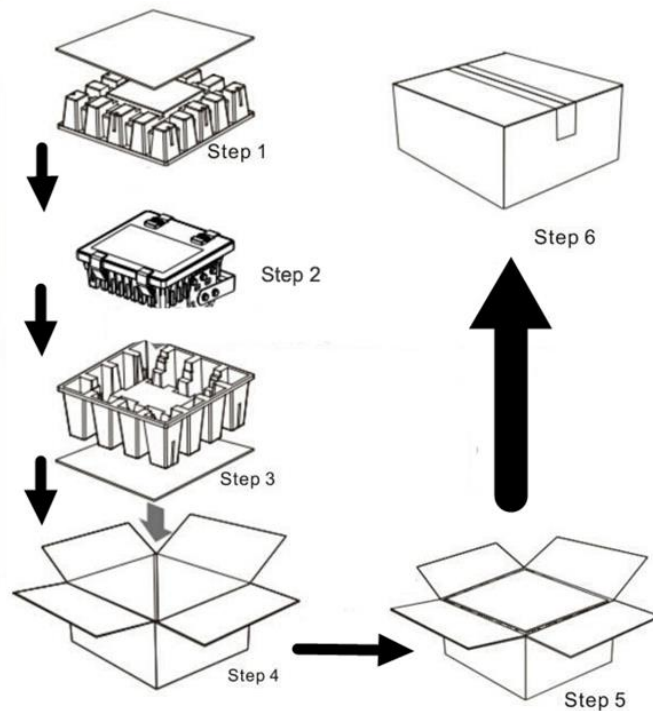

● Installation

- 1、 Before installation, please check the installation guide as Diagram1, Diagram 2 and Diagram 3 shows.
- 2、 Please fix the stands of the fixtures on the mounting holes and lock the stands by screws.
- 3、 Ensure the luminous direction is down. just like Diagram 4 shows.
- 4、 Connect (L: Black N: White GND: Green), According to the American connection standard.
- 5、 IP grade: IP65
- 6、 Switch on power
- 7、 Please see attached connection instruction

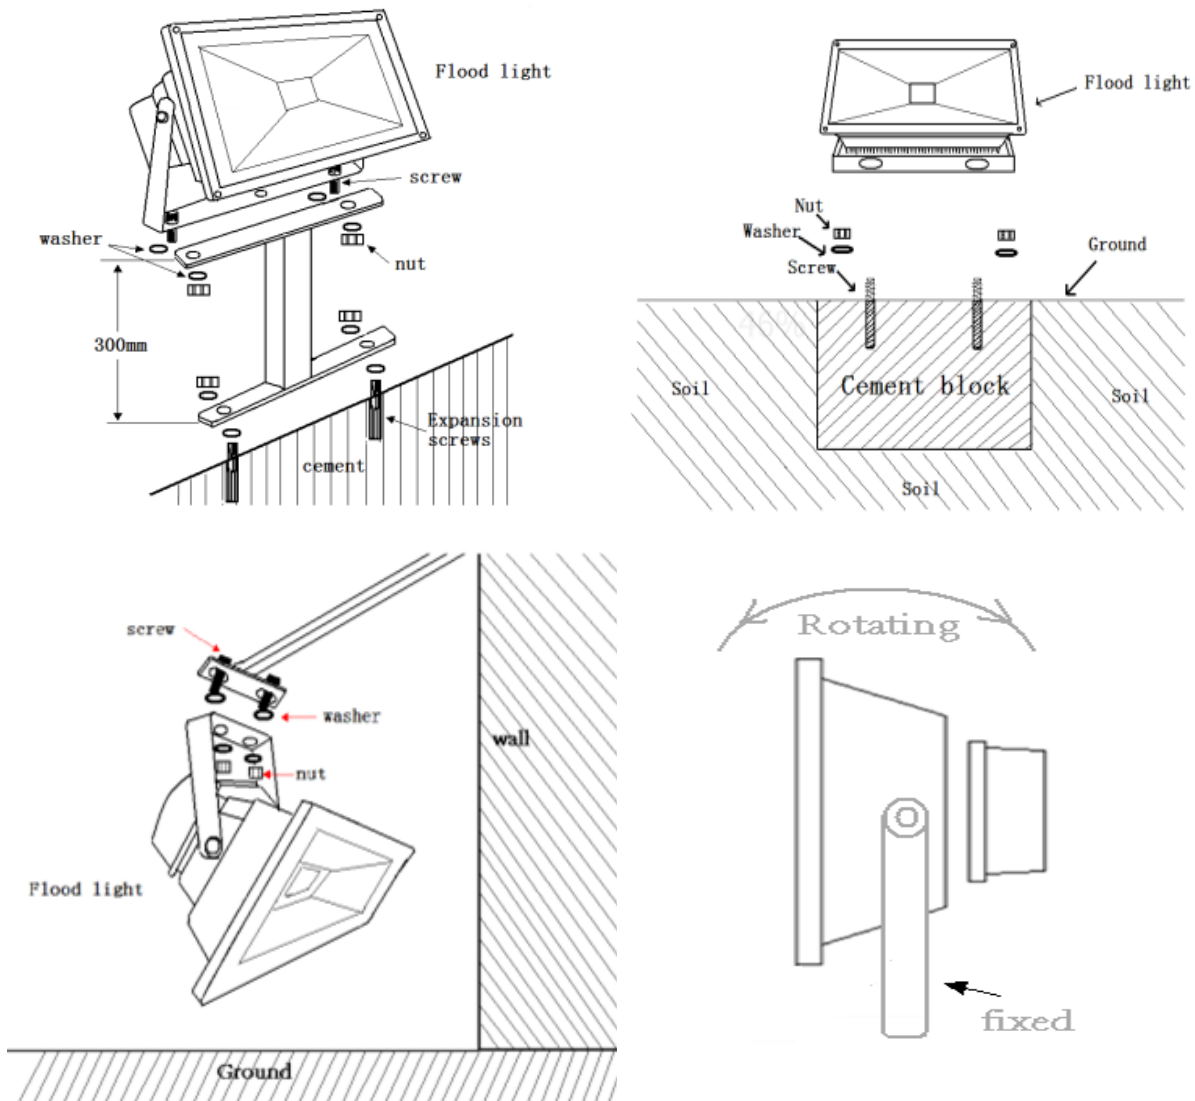

● Products Application Cases



The date mentioned in this file is for reference only, and the specific date should be subject to the specified products.

