



Date: _____ Location: _____
Product: _____ Project: _____
Quantity: _____ Catalog #: _____

LED GTL-LHB V2 Linear High Bay Light Series



110W or 160W

Special Order:

- Other CCTs

CONSTRUCTION:

PMMA lens material. Steel and aluminum body.

OPTICAL SYSTEM:

Samsung 2835 LED chips. Frosted lens. 120° beam angle options.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -20°C to 40°C, -4°F to 104°F

INSTALLATION & MOUNTING:

Hanging hook or pendant mount.

CONTROLS & DIMMING:

0-10V dimming comes standard. Suitable for use with LED dimmers. Motion sensor and remote-control options available.

FEATURES

- IP54 rated
- Easy installation and maintenance
- 100,000 hours lifetime

SUITABLE APPLICATIONS


- Warehouses
- Stadiums
- Factories
- Supermarkets
- Logistic Centers
- Exhibition Halls



MODEL NUMBER – 4,000K 5,000K	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
GTL-LHB110W-40K-V2-[Blank,EM]-[Blank,MS]	110W	14,596LM	131.5LM/W	80	0.9	20%	250W HID
GTL-LHB110W-50K-V2-[Blank,EM]-[Blank,MS]	110W	14,718LM	132.6LM/W	80	0.9	20%	250W HID
GTL-LHB160W-40K-V2-[Blank,EM]-[Blank,MS]	160W	21,123LM	131.2LM/W	80	0.9	20%	400W HID
GTL-LHB160W-50K-V2-[Blank,EM]-[Blank,MS]	160W	21,203LM	131.7LM/W	80	0.9	20%	400W HID

Series	Wattage	CCT Options	Dimming Options	Version
GTL-LHB	110W 160W	4,000K 5,000K	0-10V Dimming Integrated Motion Sensor	V2 = Version 2
Optional				
MS - Motion Sensor EM – Emergency Battery				

MEASUREMENTS


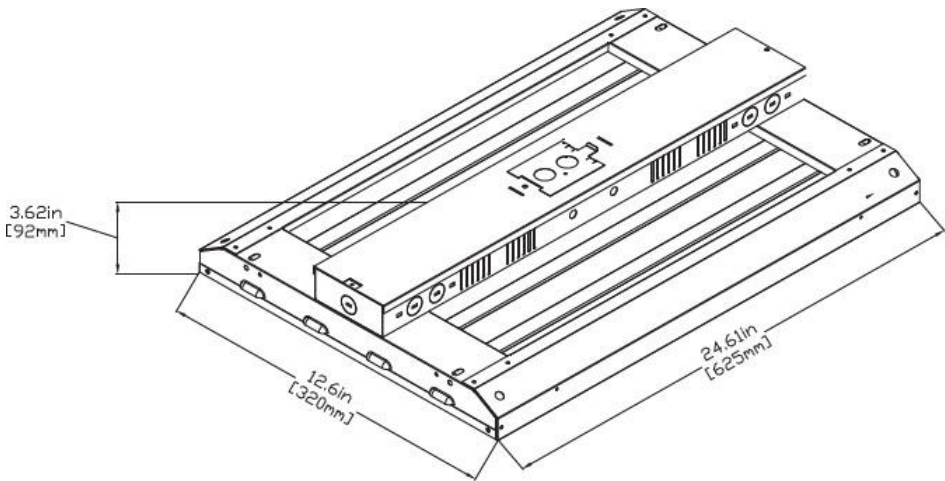


110W or 160W

MODEL	QUANTITY	WEIGHT
GTL-LHB110W-40K-V2-[Blank,EM]-[Blank,MS]	1	10.80 lbs
GTL-LHB110W-50K-V2-[Blank,EM]-[Blank,MS]	1	10.80 lbs
GTL-LHB160W-40K-V2-[Blank,EM]-[Blank,MS]	1	10.80 lbs
GTL-LHB160W-50K-V2-[Blank,EM]-[Blank,MS]	1	10.80 lbs



PHOTOMETRIC DATA

110W

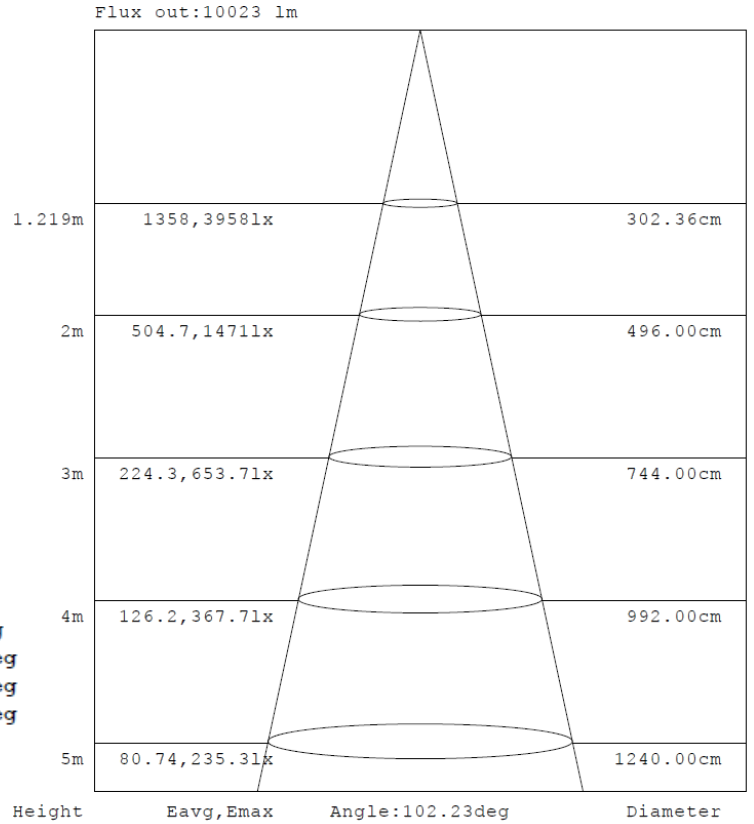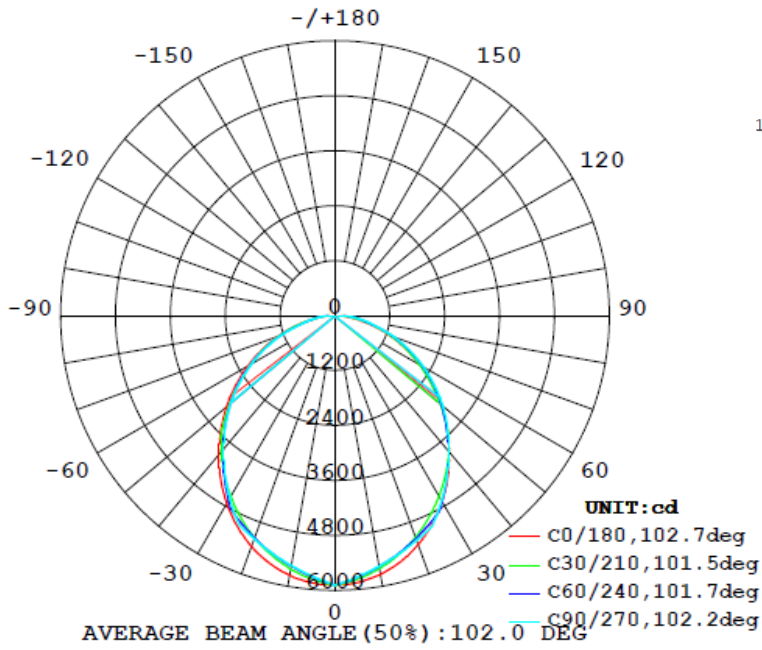

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

160W

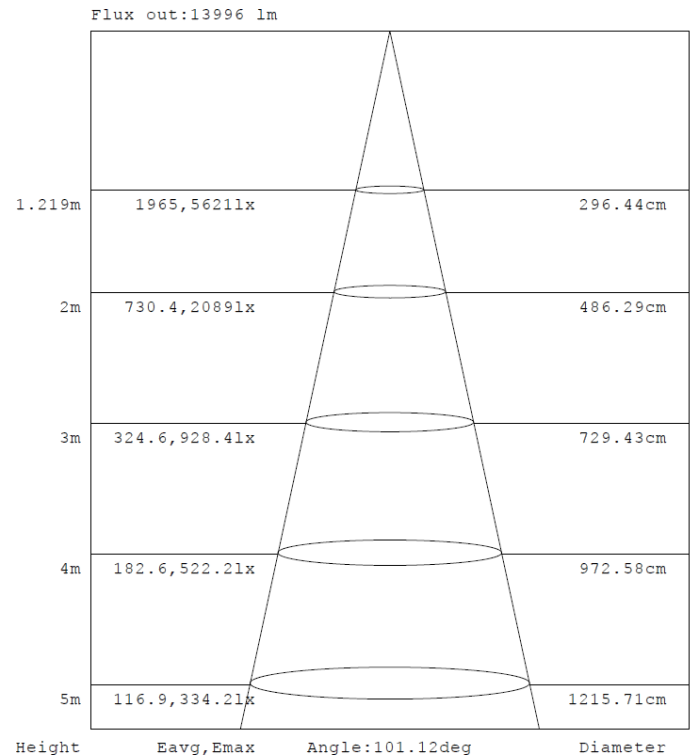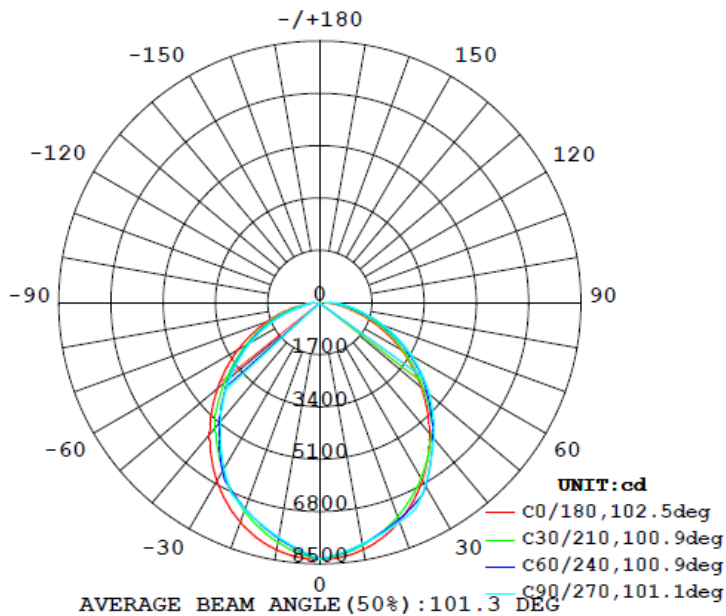


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

MOUNTING OPTIONS

Pendant Mount



Chain & Hook



OPTIONAL ACCESSORIES



Non-Dim Motion Sensor
GTL-BRI819P-B-O



Motion Sensor
GTL-BRI819P-B-D



Remote Control
GTL-RC100



Emergency Driver
GTL-EMDR-25WHV