



Date: _____ Location: _____
Product: _____ Project: _____
Quantity: _____ Catalog #: _____

LED 4FT GTL-LHB Linear High Bay Light Series



160W or 220W

FEATURES

- IP54 rated
- Easy installation and maintenance
- 100,000 hours lifetime

SUITABLE APPLICATIONS

- Warehouses
- Stadiums
- Factories
- Supermarkets
- Logistic Centers
- Exhibition Halls

Special Order:

- Other CCTs

CONSTRUCTION:

PMMA lens material. Steel and aluminum body.

OPTICAL SYSTEM:

Samsung 2835 LED chips. Frosted lens. 120° beam angle options.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -20°C to 40°C, -4°F to 104°F

INSTALLATION & MOUNTING:

Hanging chain or pendant mount.

CONTROLS & DIMMING:

0-10V dimming comes standard.




MODEL NUMBER – 5,000K	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
GTL-LHB4FT160W-50K	160W	21,792LM	136.2LM/W	80	0.9	20%	400W HID
GTL-LHB220W-50K	220W	30,189LM	136.6LM/W	80	0.9	20%	600W HID

LED 4FT GTL-LHB Linear High Bay Light Series

Series	Wattage	CCT Options	Dimming Options
GTL-LHB	160W 220W	5,000K	0-10V Dimming

MEASUREMENTS

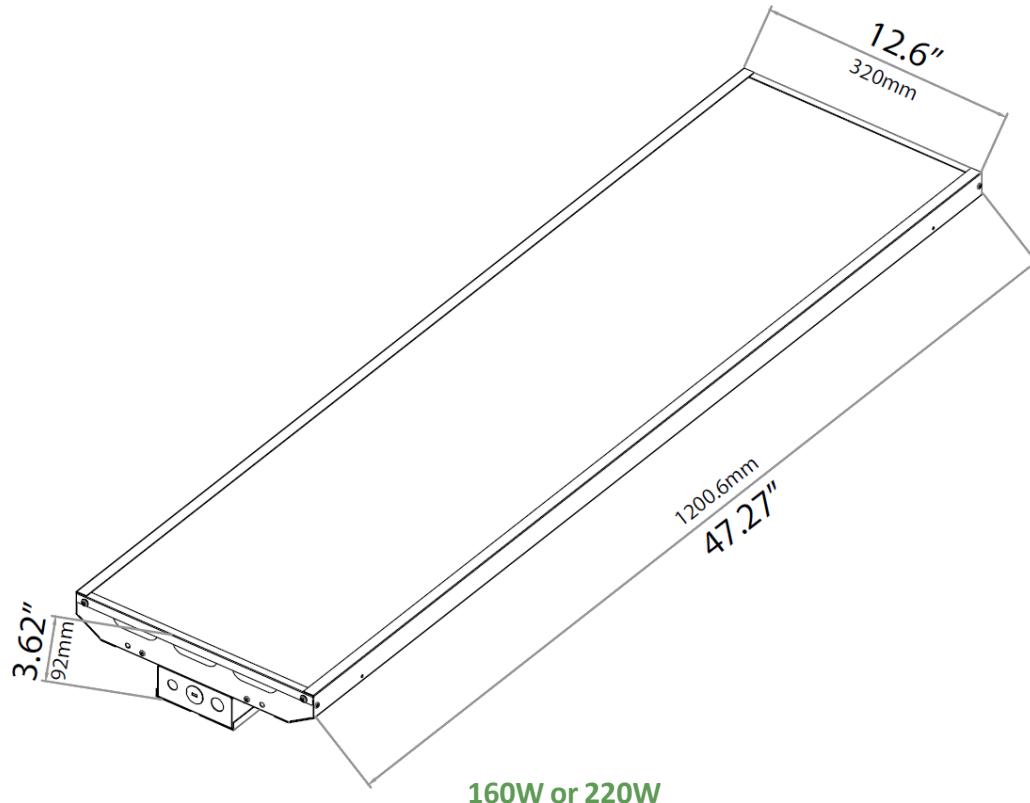

MODEL	QUANTITY	WEIGHT
GTL-LHB4FT160W-50K	1	18.25 lbs
GTL-LHB220W-50K	1	18.25 lbs

MOUNTING OPTIONS

Pendant Mount



Chain & Hook



OPTIONAL ACCESSORIES



Non-Dim Motion Sensor
GTL-BRI819P-B-O



Motion Sensor
GTL-BRI819P-B-D



Remote Control
GTL-RC100



Emergency Driver
GTL-EMDR-25WHV