



Date: _____ Location: _____
 Product: _____ Project: _____
 Quantity: _____ Catalog #: _____

LED Multi Watt Multi CCT Back Lit Panel

FEATURES

- Default Wattage is the highest wattage
 - 2x4 – 49W
 - 2x2 – 29W
 - 1x4 – 29W
- Default CCT: 5,000K
- IP20 rating – dry location
- Glare-free / flicker-free lighting
- 100,000 hours lifetime

SUITABLE APPLICATIONS

- Warehouses
- Schools
- Factories
- Offices
- Supermarkets
- Logistic Centers
- Exhibition Halls

1x4

15W, 19W, 24W and 29W

2x2

15W, 19W, 24W and 29W

2x4

29W, 34W, 39W and 49W

CONSTRUCTION:

Steel and Aluminum frame. PMMA lens material to prevent panel from yellowing. The entire fixture functions as a heat sink to keep the LEDs cooler to prolong the life of the light.

OPTICAL SYSTEM:

Lumiled 2835 LED chips. 120° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

120-277V input standard. 0-10V dimming.
 -20°C to 50°C

INSTALLATION & MOUNTING:

Fits standard T-bar and narrow grid drop ceilings.
 Surface mount kit, recessed kit or hanging kit.

CONTROLS & DIMMING:




0-10V dimming comes standard. Suitable for use with LED dimmers.



MODEL NUMBER – 3,500K, 4,000K and 5,000K	SIZE	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
GTL-14BLPL-MWMCCT-HL-[Blank,EM]-[Blank,MS]	1x4	15W	1,888.2LM	125.88LM/W	82.9	0.9801	10.65%	150W HID
GTL-14BLPL-MWMCCT-HL-[Blank,EM]-[Blank,MS]	1x4	19W	2,391.72LM	125.88LM/W				150W HID
GTL-14BLPL-MWMCCT-HL-[Blank,EM]-[Blank,MS]	1x4	24W	3,021.1LM	125.88LM/W				150W HID
GTL-14BLPL-MWMCCT-HL-[Blank,EM]-[Blank,MS]	1x4	29W	3,642.6LM	125.88LM/W				150W HID
GTL-22BLPL-MWMCCT-HL-[Blank,EM]-[Blank,MS]	2x2	15W	1,898.55LM	126.57LM/W	83.1	0.9797	10.83%	150W HID
GTL-22BLPL-MWMCCT-HL-[Blank,EM]-[Blank,MS]	2x2	19W	2,404.83LM	126.57LM/W				150W HID
GTL-22BLPL-MWMCCT-HL-[Blank,EM]-[Blank,MS]	2x2	24W	3,037.68LM	126.57LM/W				150W HID
GTL-22BLPL-MWMCCT-HL-[Blank,EM]-[Blank,MS]	2x2	29W	3,699.5LM	126.57LM/W				150W HID
GTL-24BLPL-MWMCCT-HL-[Blank,EM]-[Blank,MS]	2x4	29W	3,799LM	131.72LM/W	84.1	0.9477	8.24%	200W HID
GTL-24BLPL-MWMCCT-HL-[Blank,EM]-[Blank,MS]	2x4	34W	4,454LM	131.72LM/W				200W HID
GTL-24BLPL-MWMCCT-HL-[Blank,EM]-[Blank,MS]	2x4	39W	5,109LM	131.72LM/W				200W HID
GTL-24BLPL-MWMCCT-HL-[Blank,EM]-[Blank,MS]	2x4	49W	6,450.5LM	131.72LM/W				200W HID

Series	Size	1x4 Wattage	2x2 Wattage	2x4 Wattage
GTL-BLPL	14 = 1x4 22 = 2x2 24 = 2x4	15W 19W 24W 29W	15W 19W 24W 29W	29W 34W 39W 49W
Color Temperature	Type	Optional		
3500K 4000K 5000K	HL = High Lumen	EM = emergency backup MS = motion sensor		



MEASUREMENTS

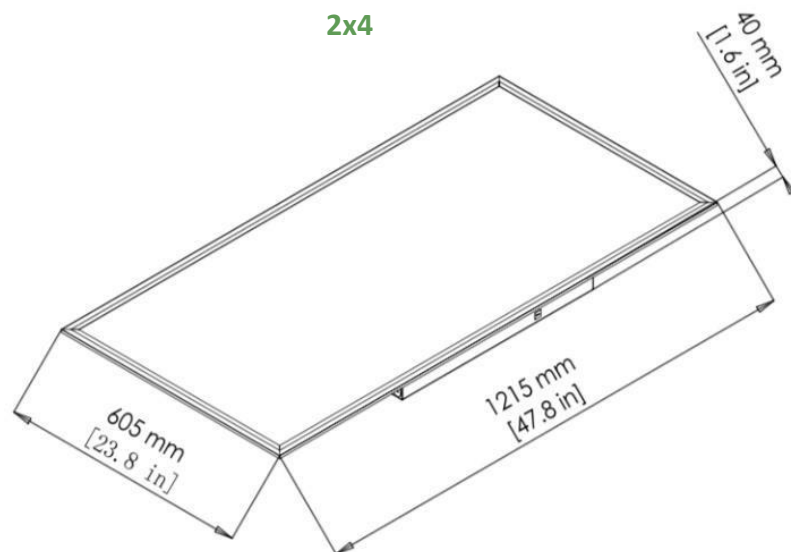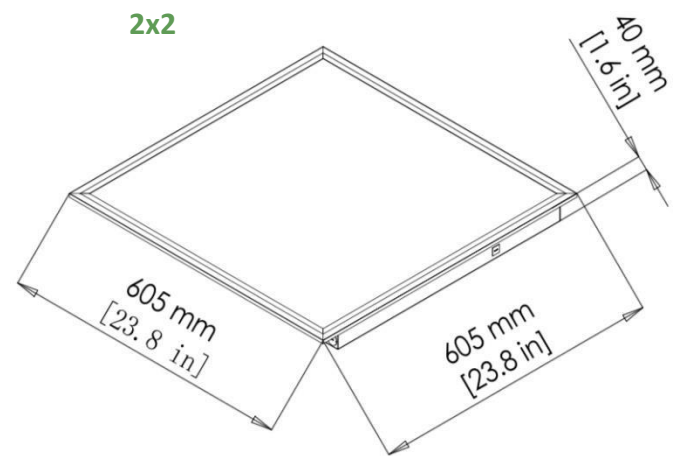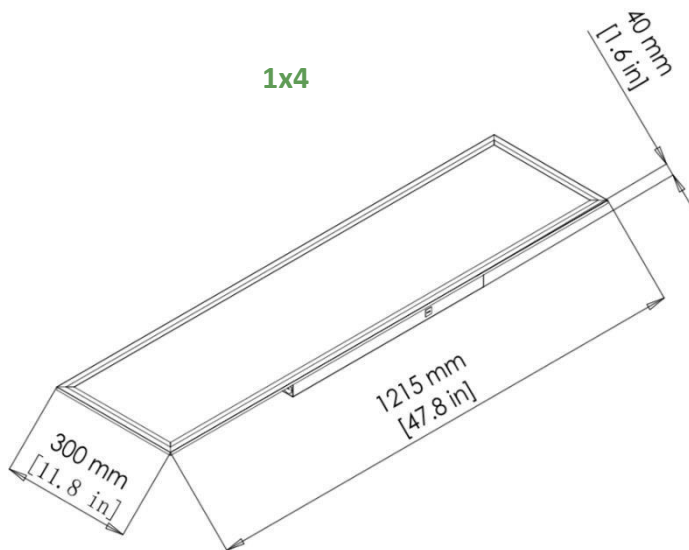

MODEL	QUANTITY	WEIGHT	UPC CODE
GTL-14BLPL-MWMCCT-HL-[Blank,EM]-[Blank,MS]	1	5.4 lbs	00815586028924
GTL-22BLPL-MWMCCT-HL-[Blank,EM]-[Blank,MS]	1	5.05 lbs	00815586028931
GTL-24BLPL-MWMCCT-HL-[Blank,EM]-[Blank,MS]	1	10.3 lbs	00815586028948

1x4 15W



Flux out:1546 lm

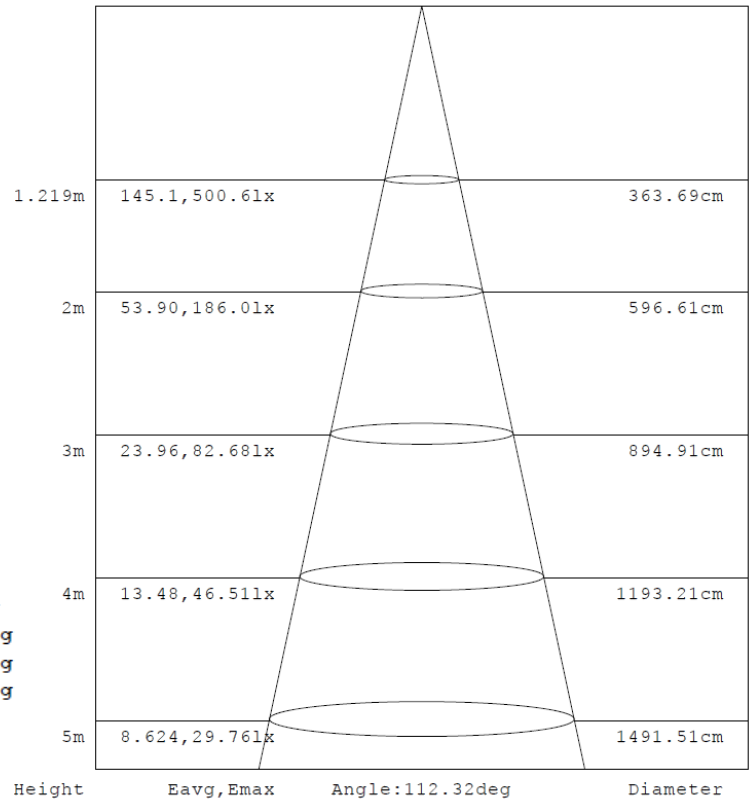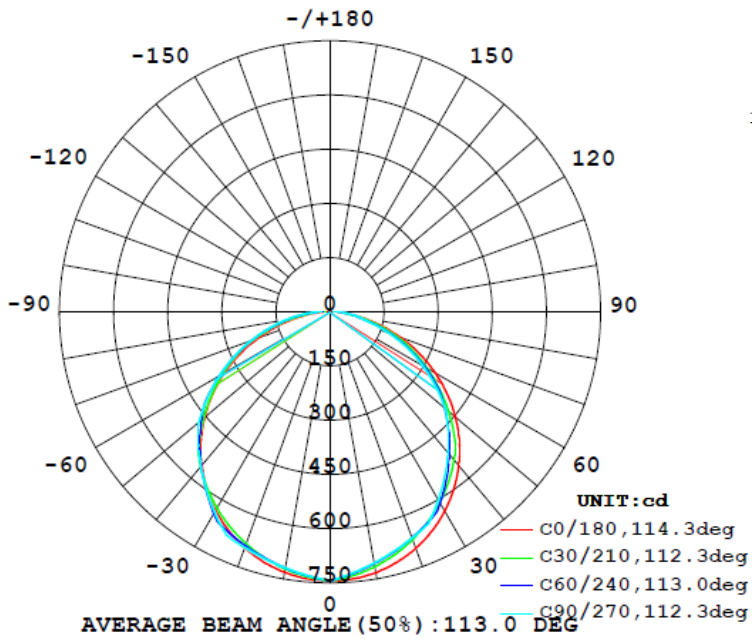

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

1x4 19W



Flux out:1884 lm

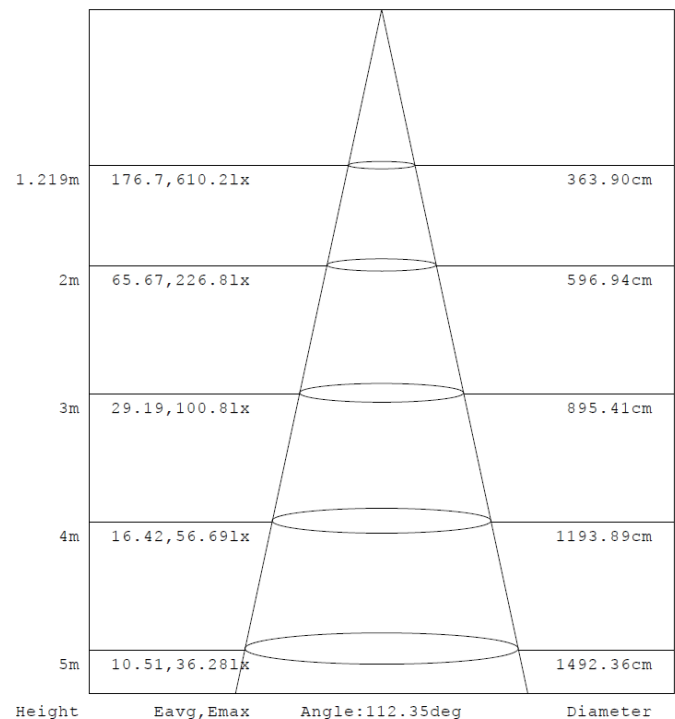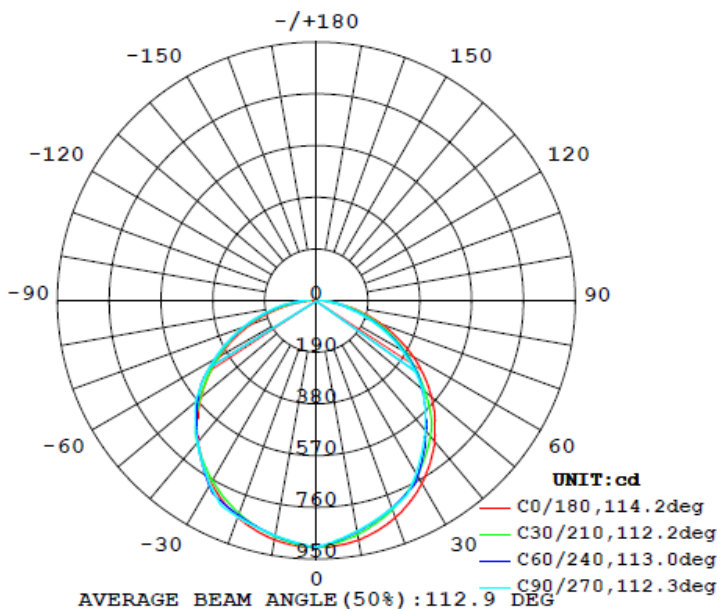

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

1x4 24W



Flux out: 2225 lm

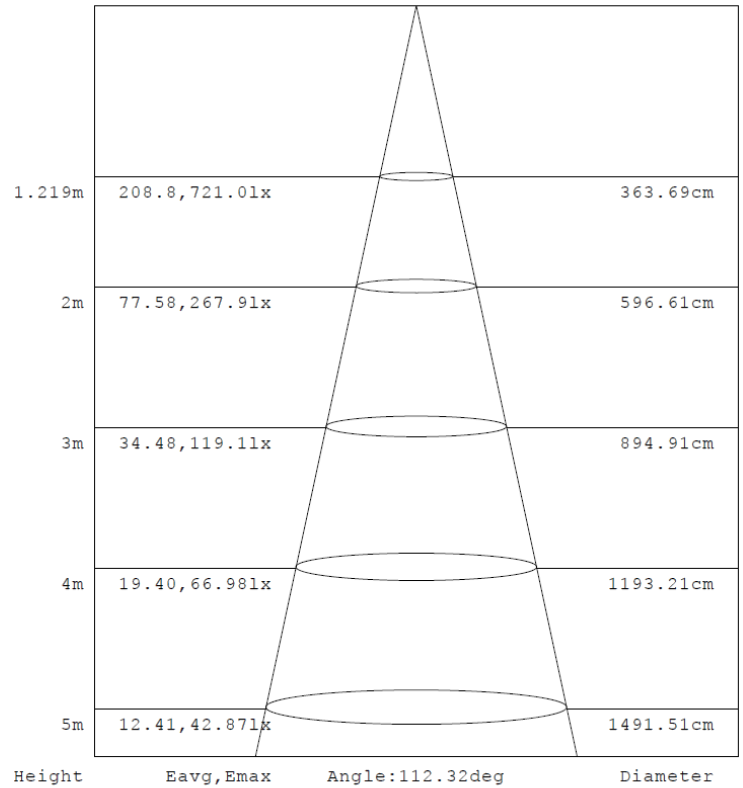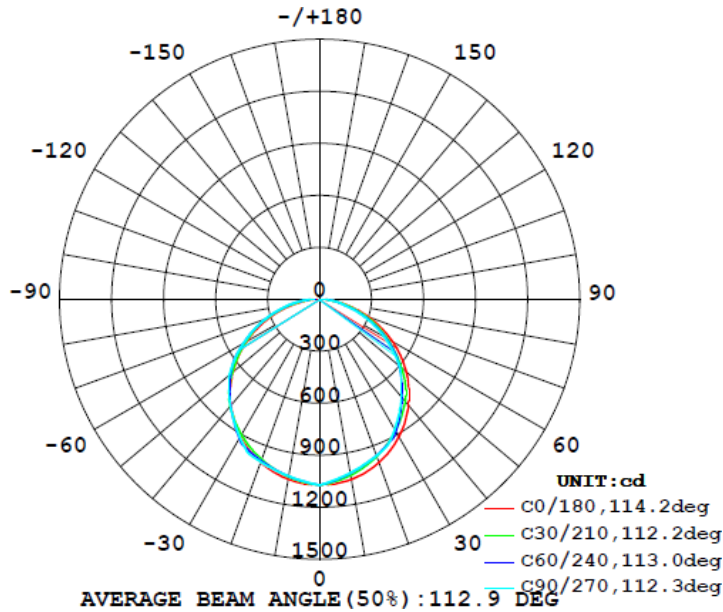

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

1x4 29W



Flux out: 2673 lm

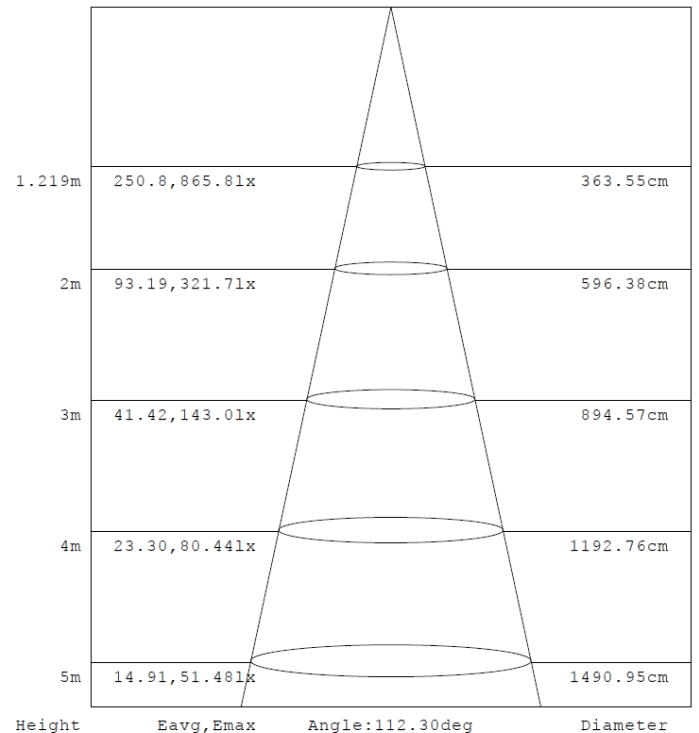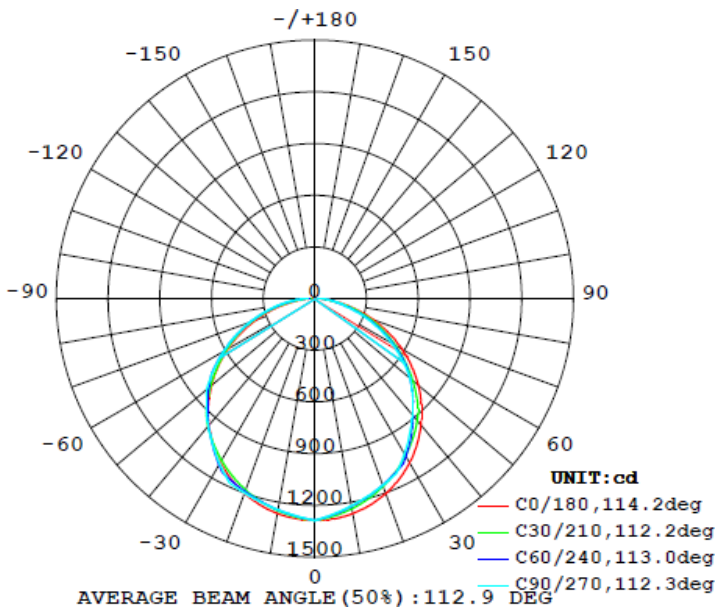

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

2x2 15W



Flux out:1471 lm

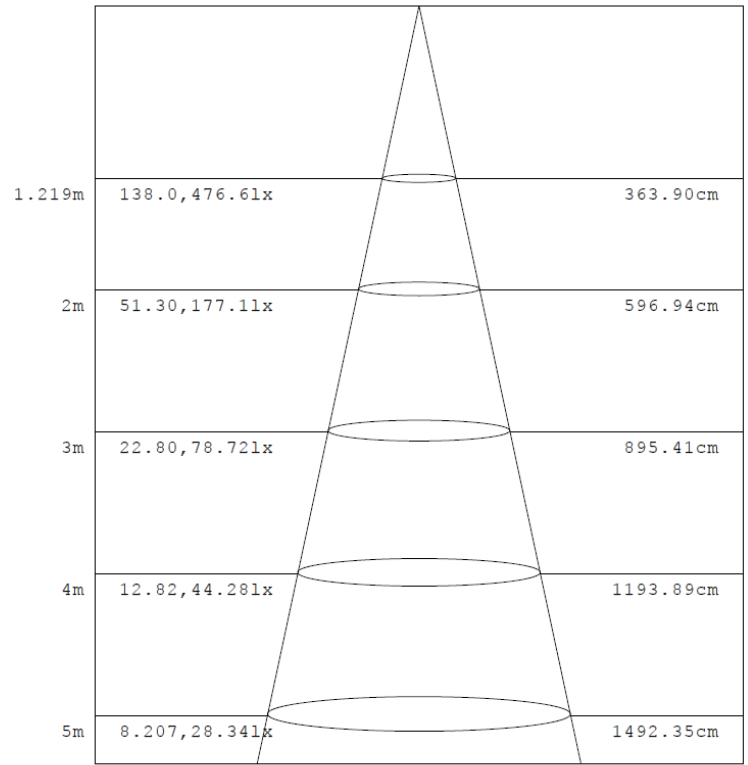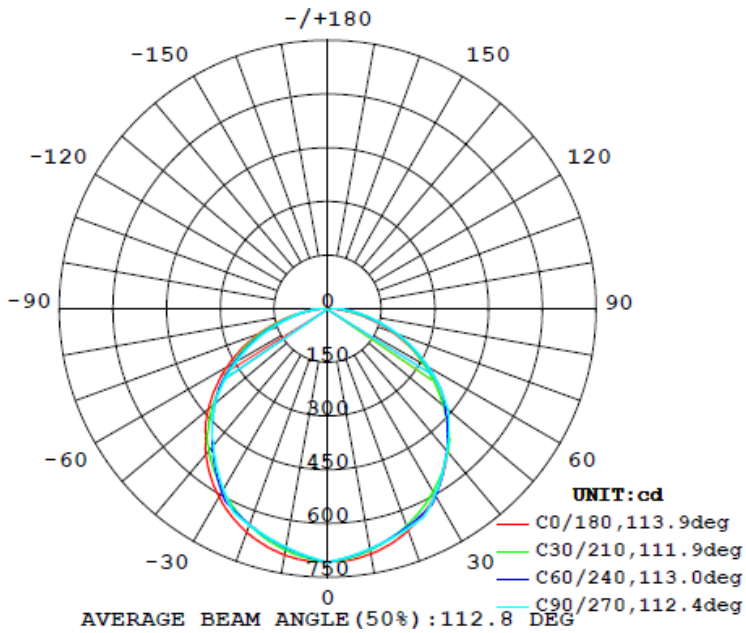

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


2x2 19W

Flux out:1866 lm

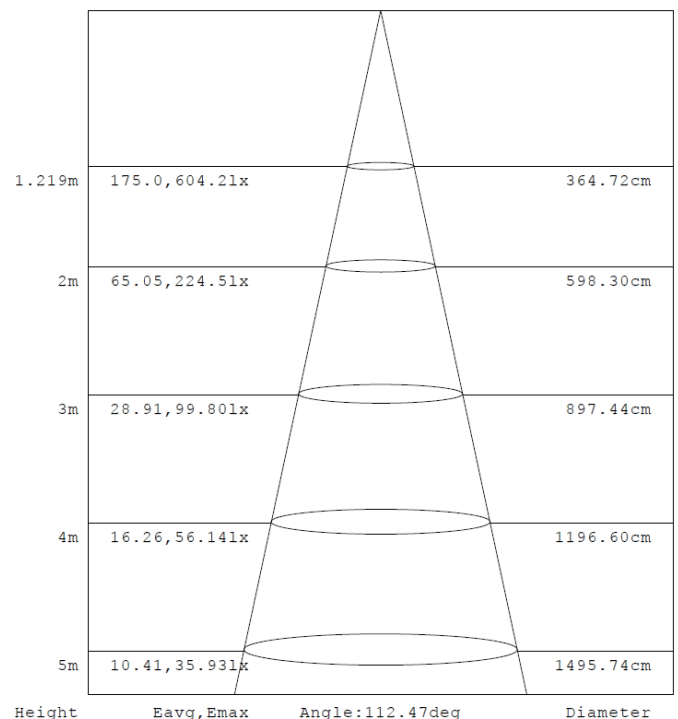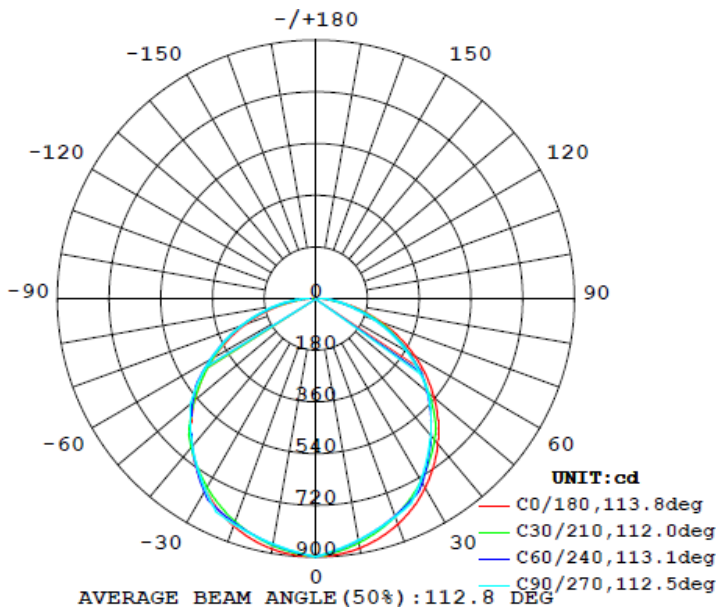


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

2x2 24W

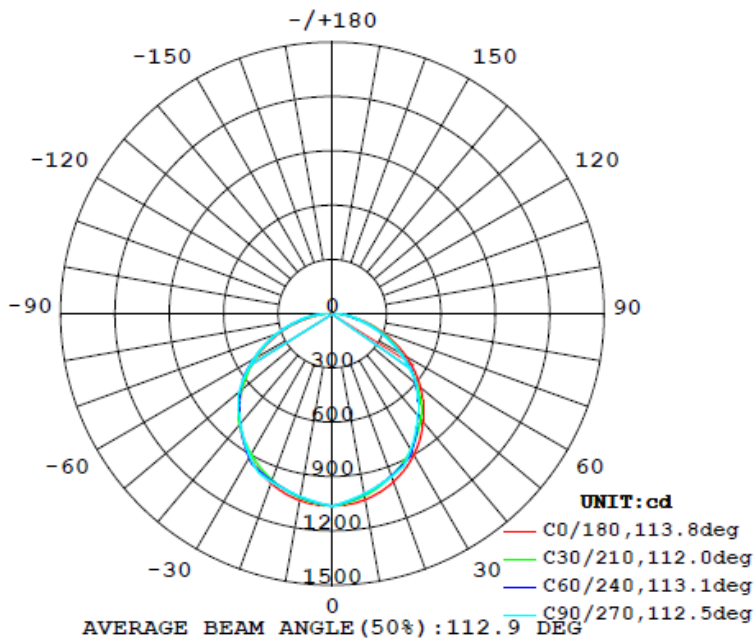


Flux out:2208 lm

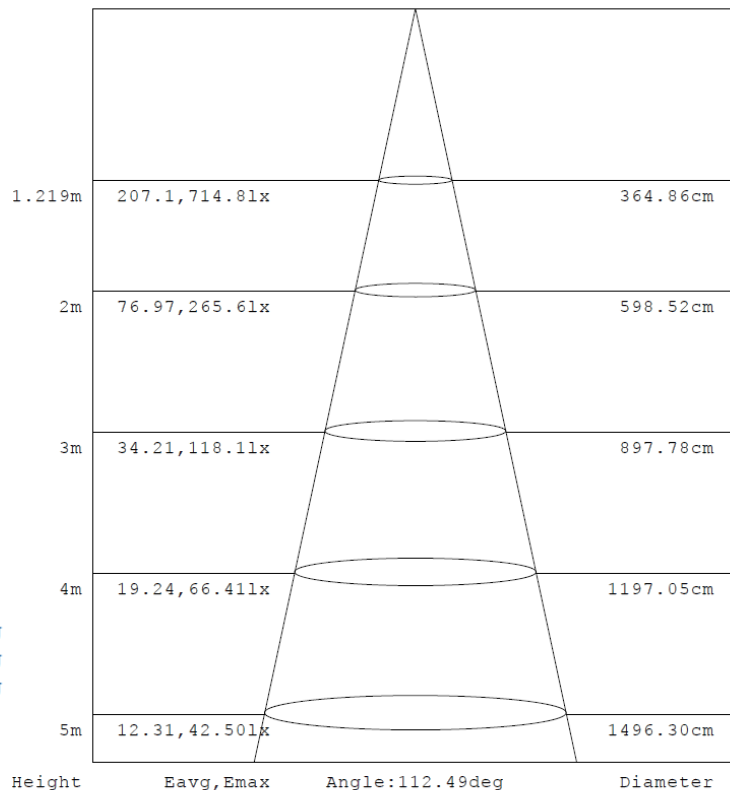


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

2x2 29W

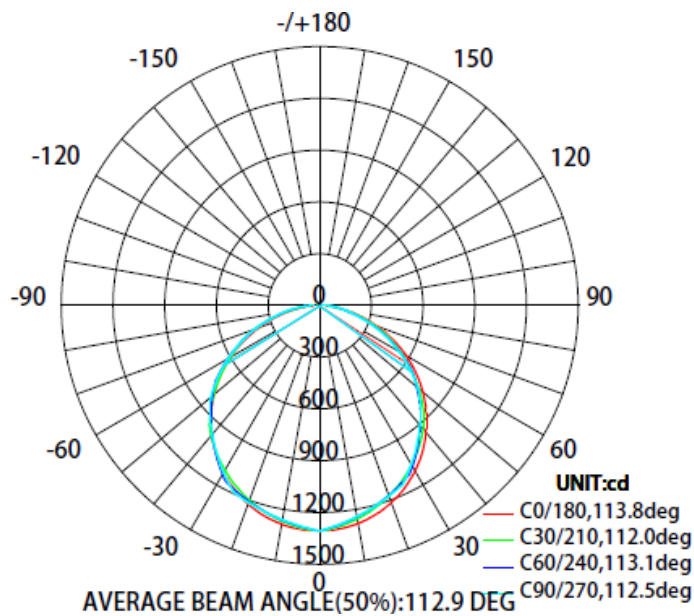



Flux out:2713 lm

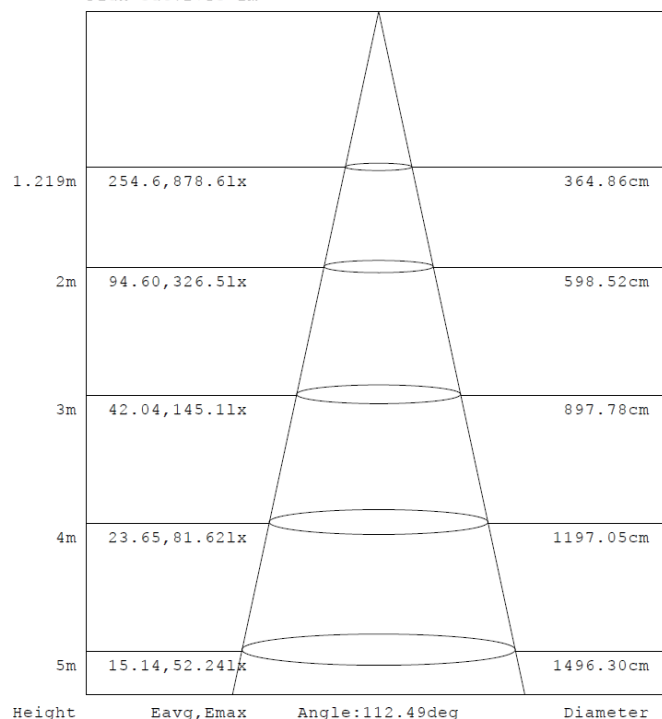

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

2x4 29W



Flux out: 2911 lm

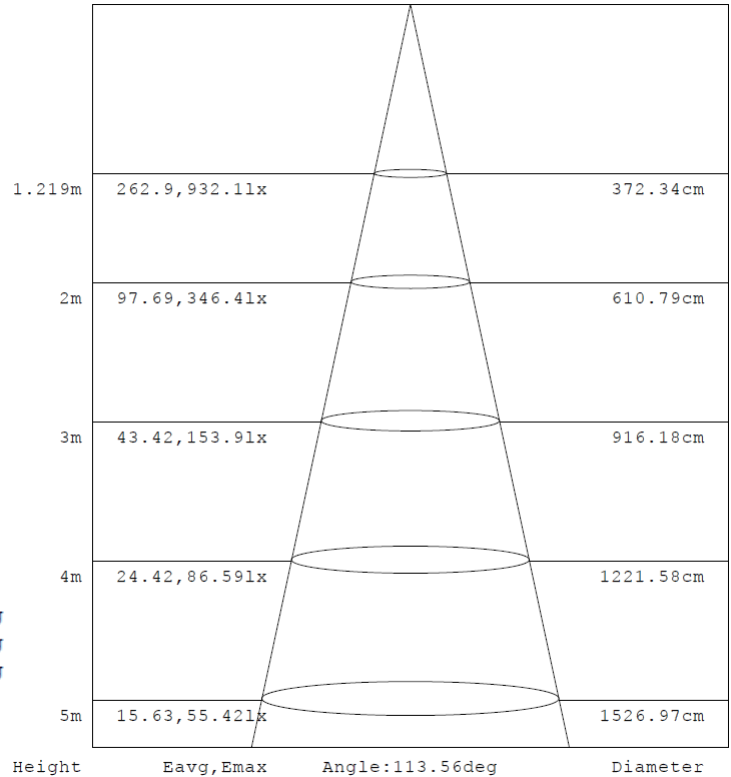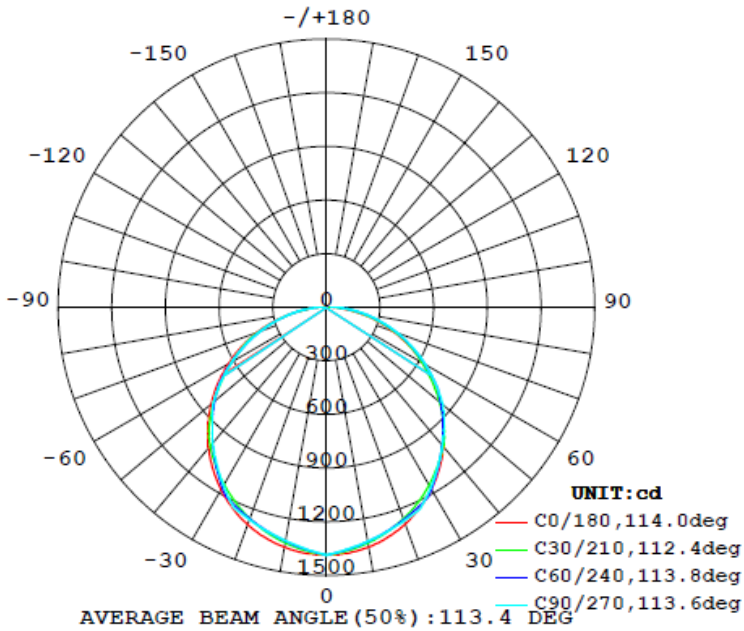

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



2x4 34W

Flux out: 3288 lm

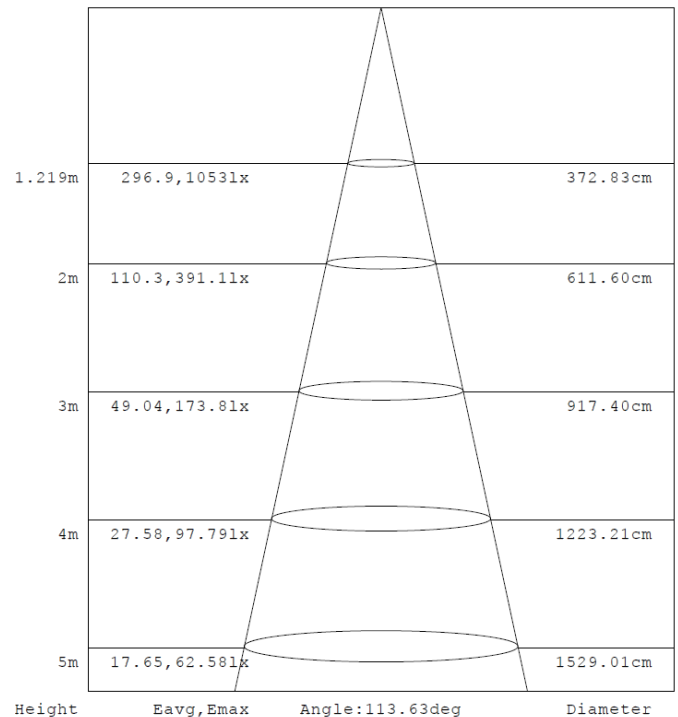
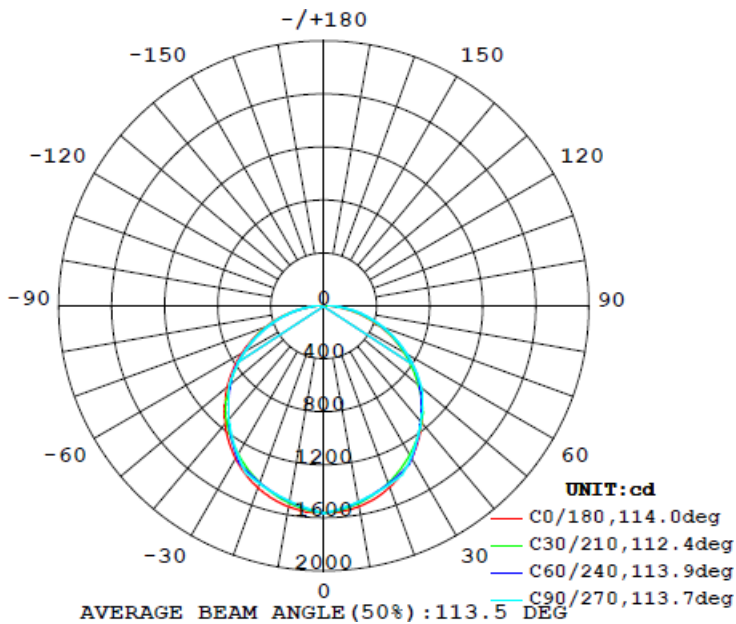


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

2x4 39W

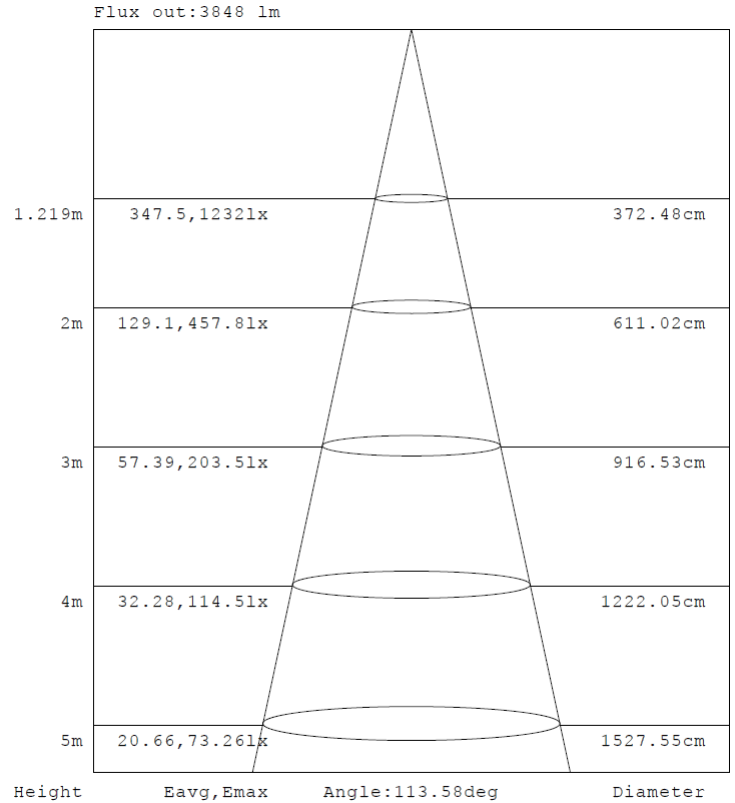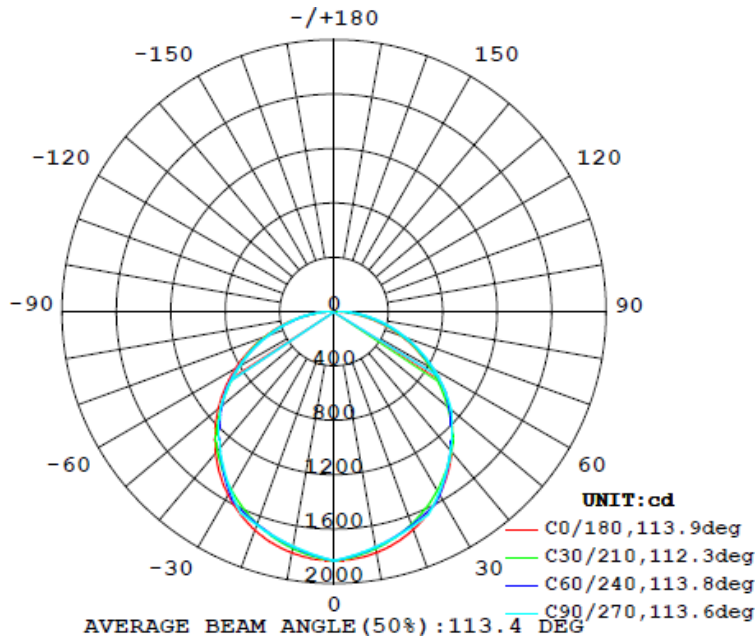


2x4 49W

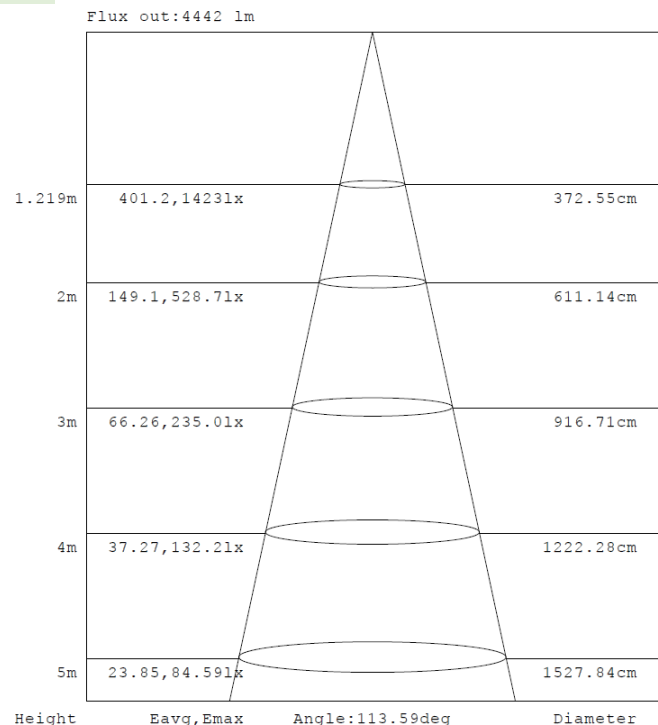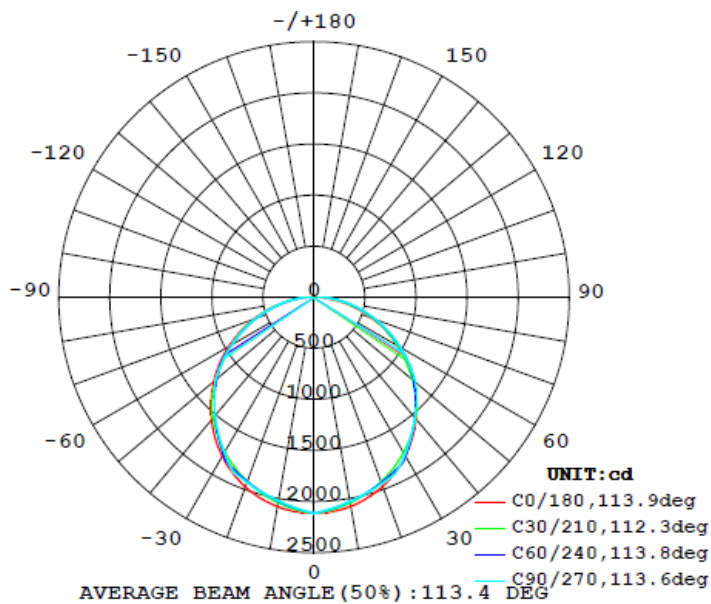

Mounting Options

Surface Mount

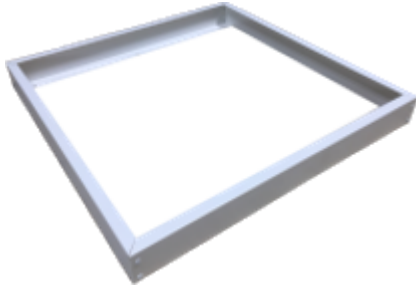

Recessed Mount



Hanging Kit



OPTIONAL ACCESSORIES



Emergency Driver



Mounting T-Bar Kit for
Emergency Driver



BPLED-EM-Bracket

