



Date: \_\_\_\_\_ Location: \_\_\_\_\_  
 Product: \_\_\_\_\_ Project: \_\_\_\_\_  
 Quantity: \_\_\_\_\_ Catalog #: \_\_\_\_\_

## LED GT-MAAL Area Light Series

100W or 150W



300W



### Special Order:

- 480V models
- Other CCTs
- Type 2 lens
- Type 4 lens
- Type 5 lens

### CONSTRUCTION:

Processed by painting and anodic oxidation treatment.

### OPTICAL SYSTEM:

Nichia SMD LED chips. 120° beam angle. Type 3 lens standard.

### WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

### ELECTRICAL:

Available as 100-277V. -40°C to 50°C, -40°F to 122°F

### INSTALLATION & MOUNTING:

Pole Mounting - Extruded Arm, Slip Fitter or U-Bracket.

### CONTROLS & DIMMING:

0-10V dimming comes standard. Daylight sensor option available.



### FEATURES

- IP65 rated
- Full cut off
- Easy installation
- Shock resistant
- Mercury and UV free
- Corrosion and rust proof
- 50,000 hours lifetime

### SUITABLE APPLICATIONS

- Warehouses
- Stadiums
- Factories
- Parking Lots
- Supermarkets
- Logistic Centers
- Exhibition Halls

MODEL NUMBER – 5,000K	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
GT-MAAL-100W-50K-TPIII-SBA	100W	14,081.7LM	141.61LM/W	70	0.9	20%	250W – 400W HID
GT-MAAL-150W-50K-TPIII-SEA	150W	21,249.8LM	143LM/W	70	0.9	20%	400W – 600W HID
GT-MAAL-300W-50K-TPIII-SEA	300W	42,137LM	145LM/W	70	0.9	20%	750W – 1,000W HID
MODEL NUMBER – 4,000K	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
GT-MAAL-300W-40K-TPIII-SEA	300W	42,137LM	145LM/W	70	0.9	20%	750W – 1,000W HID

## OPTIONAL ACCESSORIES



Slip fitter



Bracket



Extruded Arm




Daylight Sensor

# LED GT-MAAL Area Light Series

Series	Wattage	Color Temperature	Lens Type	Voltage
GT-MAAL	100W 150W 300W	4000K 5000K	T3 = Type 3	SBA = 100-277V SEA = 480V

## MEASUREMENTS

### 100W or 150W

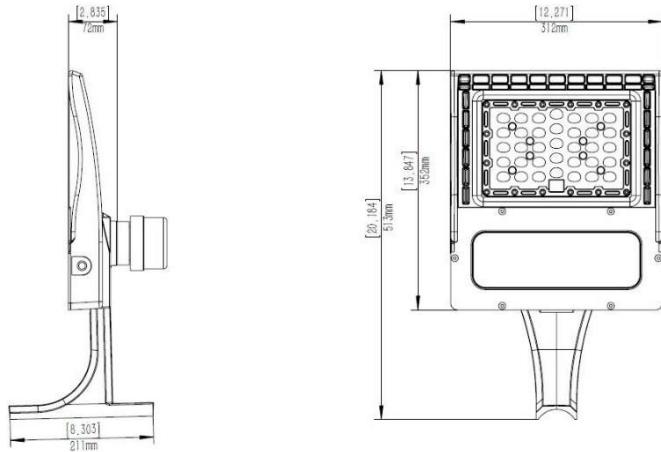

### 300W

