



Date: _____ Location: _____

Product: _____ Project: _____

Quantity: _____ Catalog #: _____

100W



150W



Special Order:

- 480V models
- Other CCTs
- Type 2 lens
- Type 4 lens
- Type 5 lens

LED GT-HLAL Area Light Series

FEATURES

- IP65 rated
- 10kV surge protection
- Driver on board
- Easy installation
- Shock resistant
- Mercury and UV free
- Corrosion and rust proof
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Warehouses
- Stadiums
- Factories
- Parking Lots
- Supermarkets
- Logistic Centers
- Exhibition Halls

CONSTRUCTION:

Polyester powder-coated finish. Stabilized to extreme climate changes without cracking or peeling. Driver is mounted in direct contact with the casting for low operating temperature and longer life.

OPTICAL SYSTEM:

120° beam angle. Type 3 lens standard.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 100-277V. -40°C to 50°C, -40°F to 122°F

INSTALLATION & MOUNTING:

Pole Mounting - Extruded Arm




MODEL NUMBER – 5,000K	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
GT-HLAL-T3100WD50K-V2	100W	12,000LM	120LM/W	70	0.99	15%	250W – 400W HID
GT-HLAL-T3150WD50K-V2	150W	18,360LM	122LM/W	70	0.9	15%	300W – 450W HID


Series	Wattage	Color Temperature	Lens Type	Version
GT-HLAL	100W 150W	5000K	T3 = Type 3	V2 = Version 2

MEASUREMENTS

100W

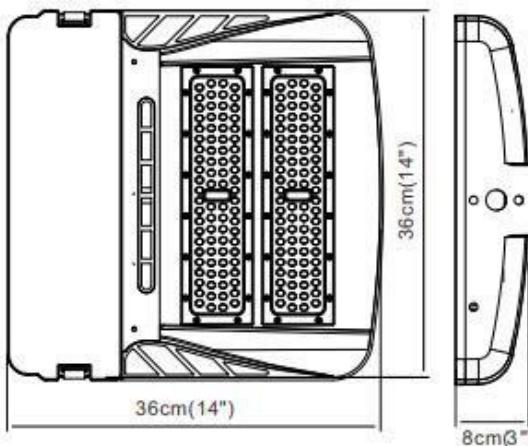

150W

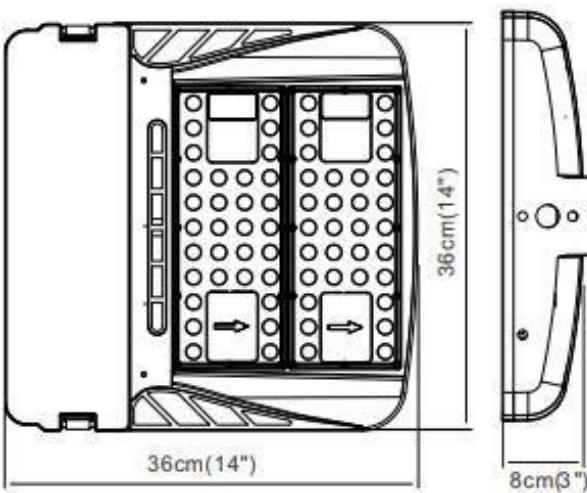

MODEL	QUANTITY	WEIGHT	UPC CODE
GT-HLAL-T3100WD50K-V2	1	lbs	00815586026647
GT-HLAL-T3150WD50K-V2	1	lbs	00815586026654