



Date: _____ Location: _____
Product: _____ Project: _____
Quantity: _____ Catalog #: _____

LED MCL Corn Light Series



FEATURES

- IP42 rated
- Non-dimming
- No fans or moving parts providing
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Area lighting
- Parking decks
- Auto dealerships
- High masts
- Housing complexes
- Shopping malls
- Sporting complexes
- Parks and Recreational areas
- Municipal lots

CONSTRUCTION:

Extruded aluminum alloy to be more conductive to heat dissipation. High quality tempered glass optics. Temperature sensor.

OPTICAL SYSTEM:

Epistar 2835 LED chips. 360° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -40°C to 60°C, -40°F to 140°F

INSTALLATION & MOUNTING:

E39 screw in base. No ballast required. Suitable for enclosed fixtures.




MODEL NUMBER – 5,000K	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
GT-MCL-45W50KHL	45W	5,333.2LM	123.1LM/W	82.1	0.9	16.7%	200W HID
GT-MCL-54W50KHL	54W	6,570LM	127LM/W	81.9	0.902	17.1%	250W HID


Series	Wattage	Color Temperature	Type
GT-MCL	45W 54W	5000K	HL = High Lumen

MEASUREMENTS

45W

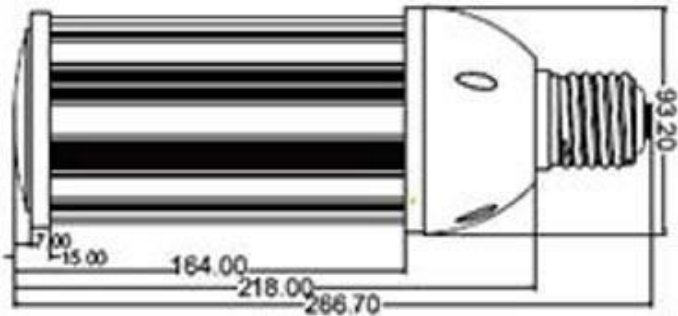

54W

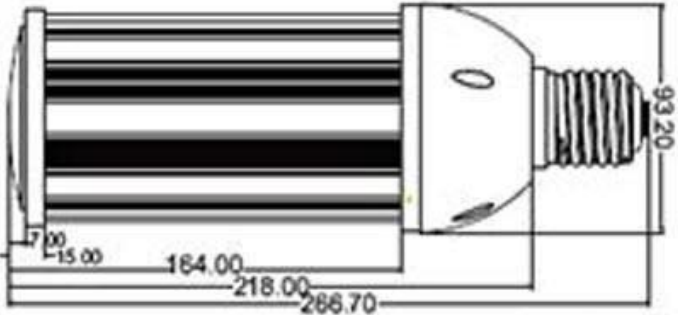

MODEL	QUANTITY	WEIGHT	UPC CODE
GT-MCL-12W50KHL	1	1.7 lbs	00815586027248
GT-MCL-27W50KHL	1	1.8 lbs	00815586027255