



Date: _____ Location: _____
 Product: _____ Project: _____
 Quantity: _____ Catalog #: _____

LED Flood Light Series

FEATURES

- IP65 rated
- Easy installation and maintenance
- No Mercury or UV
- Daylight sensor available
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Warehouses
- Stadiums
- Factories
- Parking Lots
- Shopping Malls
- Supermarkets
- Logistic Centers
- Auto dealerships



CONSTRUCTION:

Aluminum housing with polyester powder-coated finish.

OPTICAL SYSTEM:

Nichia 3030 LED chips. High quality tempered glass optics. 120° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 100-277V input. -20°C to 50°C, -4°F to 122°F

INSTALLATION & MOUNTING:

Bracket mounting.




Special Order:

- Other CCTs

MODEL NUMBER – 5,000K	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
GT-FL-10W50K-HL	10W	1,200LM	120LM/W	75	0.95	20%	60W
GT-FL-30W50K-HL	30W	3,800LM	127LM/W	75	0.95	10%	75W
GT-FL-50W50K-HL	50W	6,200LM	124LM/W	75	0.95	20%	100W – 150W
GT-FL-100W50K-HL	100W	12,800LM	128LM/W	75	0.95	13%	200W – 250W
GT-FL-150W50K-HL	150W	19,000LM	127LM/W	75	0.95	12%	300W - 400W
GT-FL-200W50K-HL	200W	24,500LM	123LM/W	75	0.95	11%	500W - 600W


Series	Wattage	Color Temperature	Voltage
GT-FL	10W 30W 50W 100W 150W 200W	5000K	LV = 120-277V

MEASUREMENTS

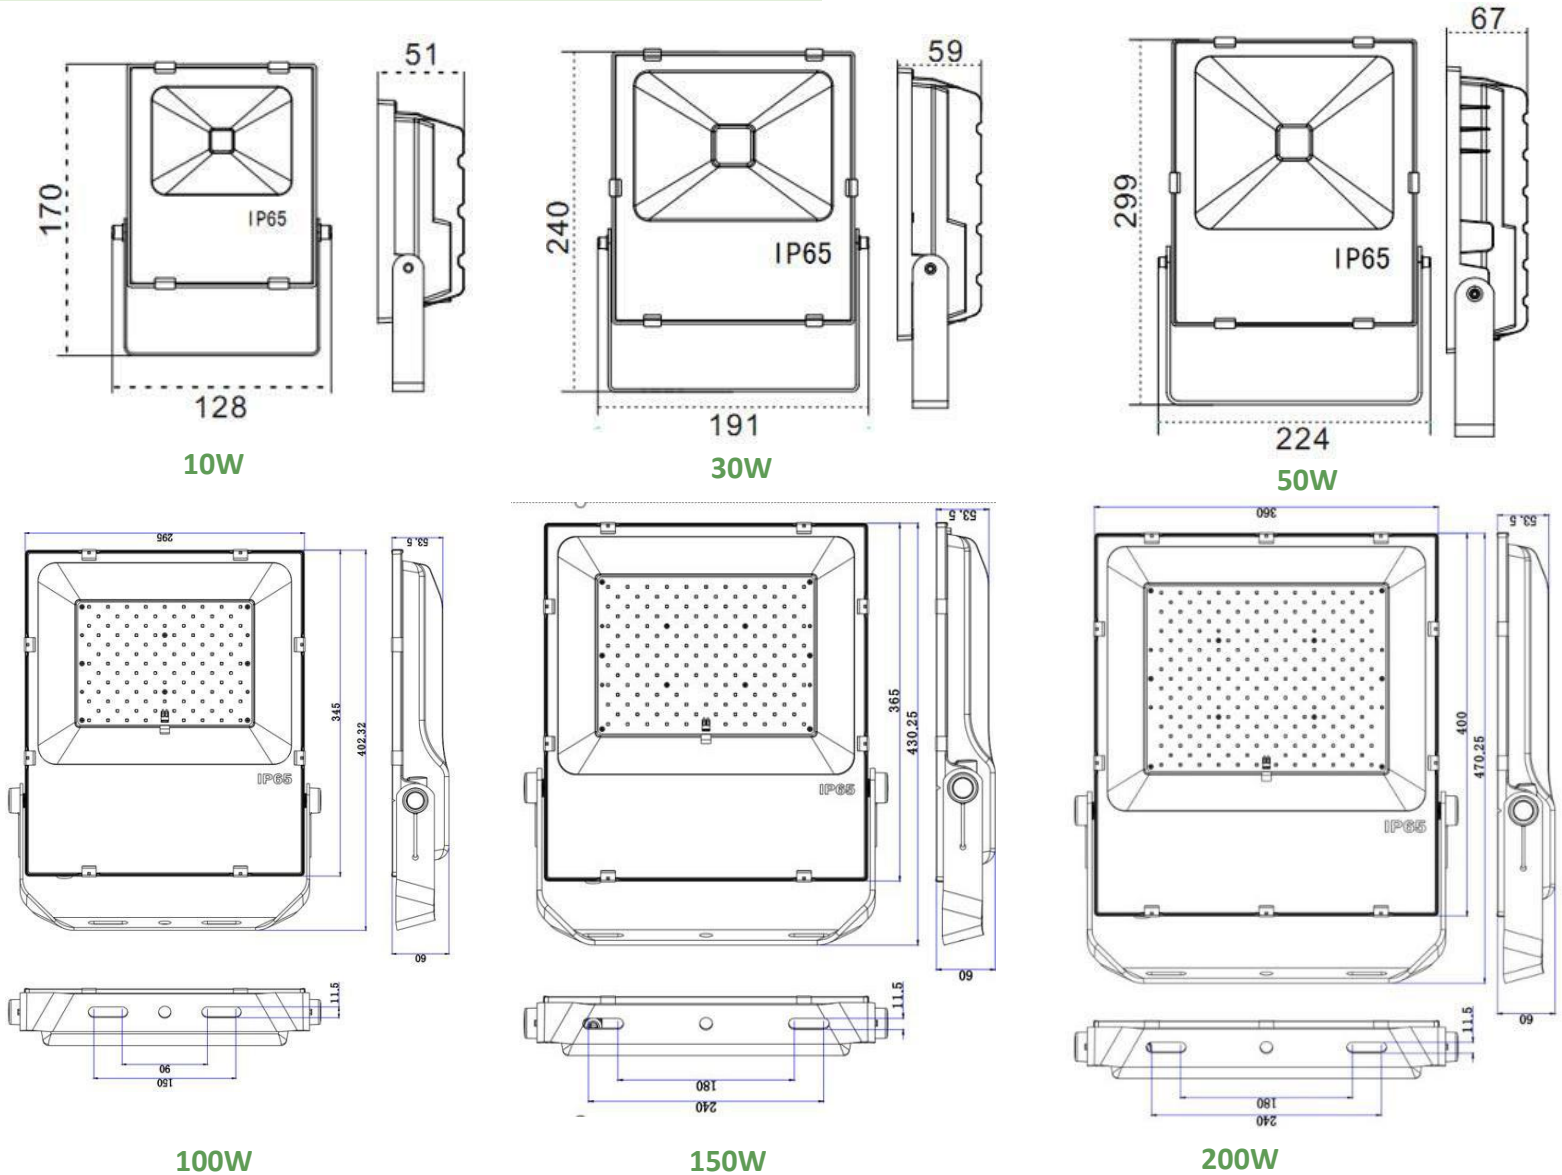


MODEL	QUANTITY	WEIGHT	UPC CODE
GT-FL-10W50K-HL	1	lbs	00815586027958
GT-FL-30W50K-HL	1	lbs	00815586027972
GT-FL-50W50K-HL	1	lbs	00815586027989
GT-FL-100W50K-HL	1	lbs	00815586027330
GT-FL-150W50K-HL	1	lbs	00815586027347
GT-FL-200W50K-HL	1	lbs	00815586028016

10W

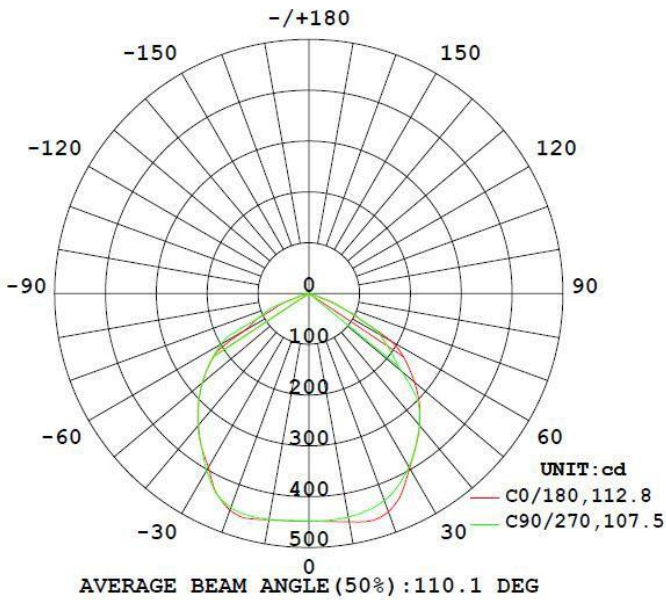


Flux out: 985.5 lm

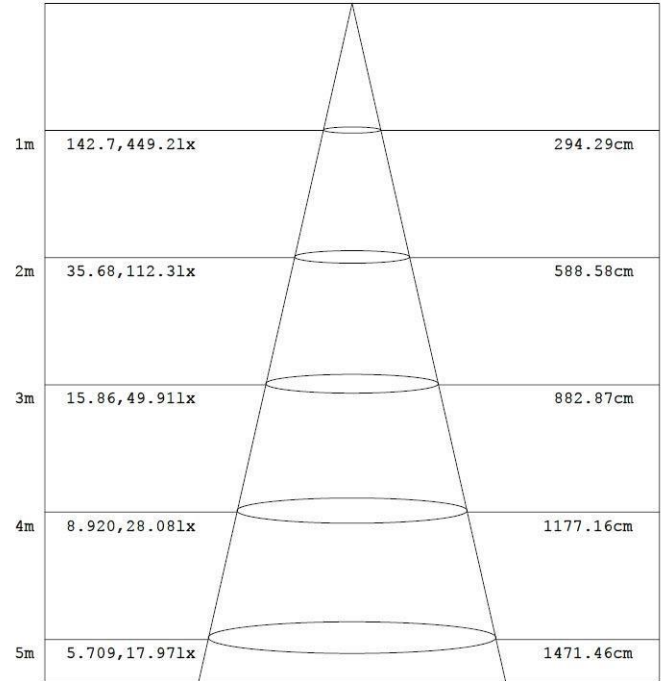


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

30W


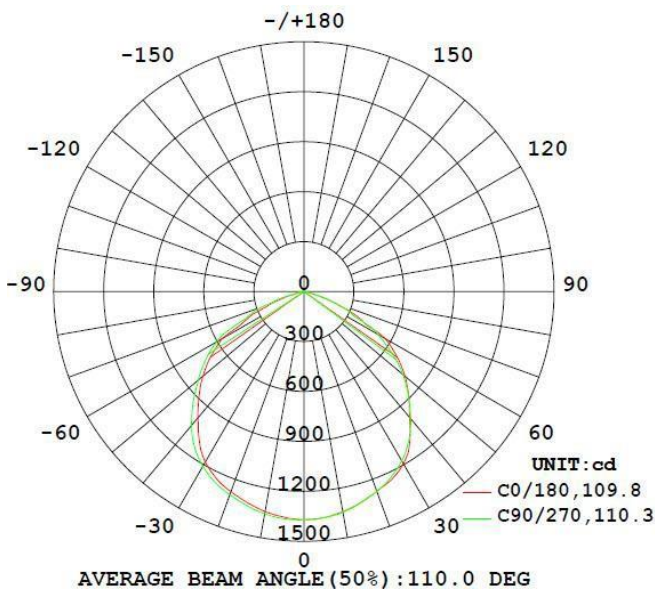


Flux out: 2879 lm


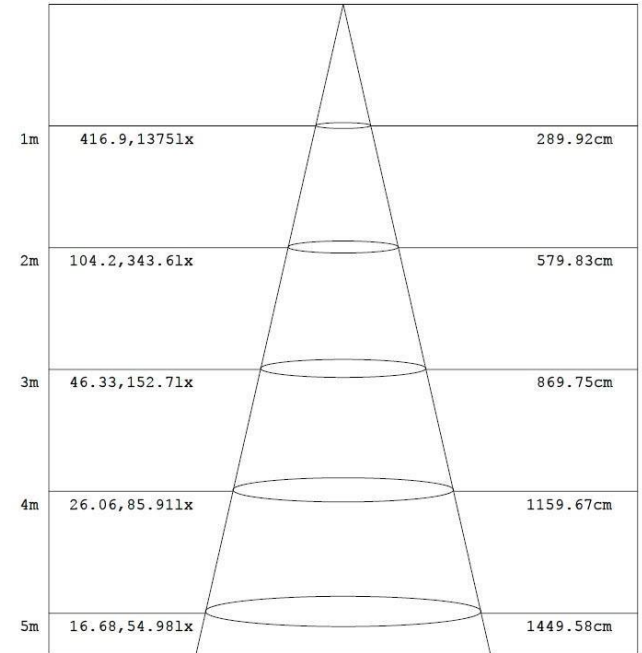


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


50W

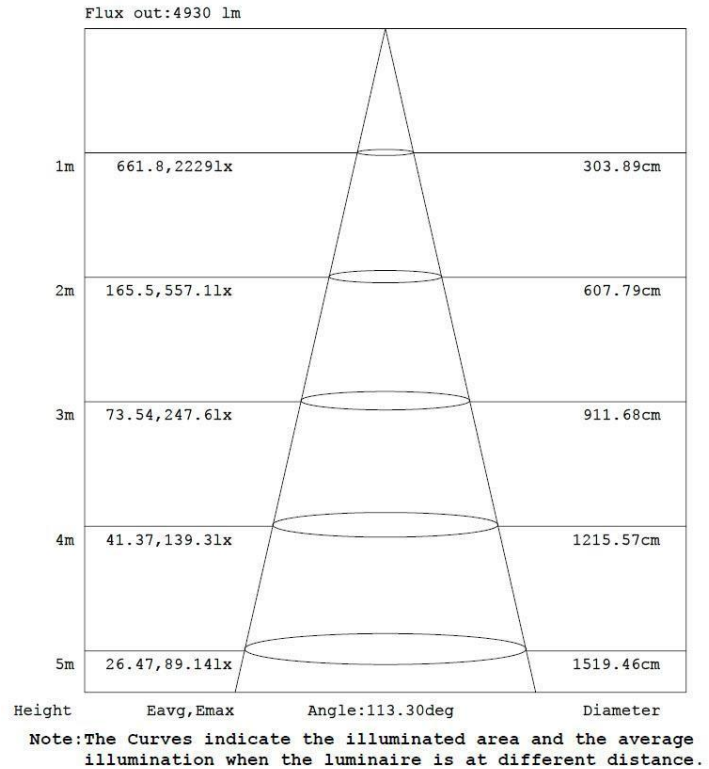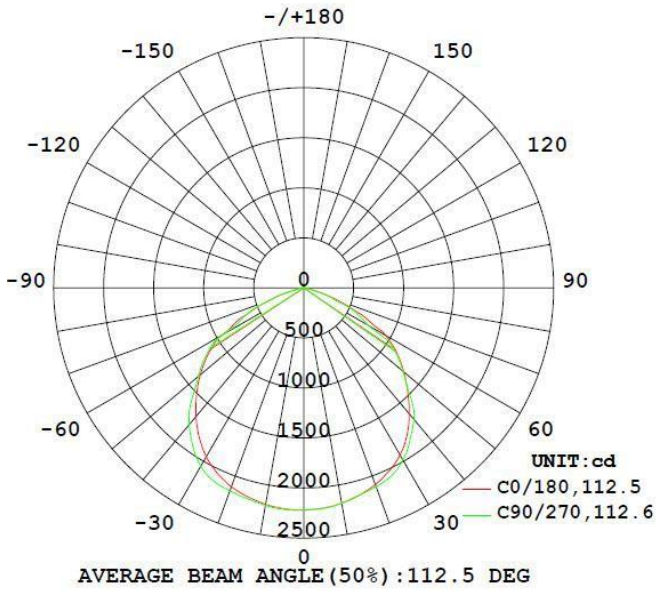


100W

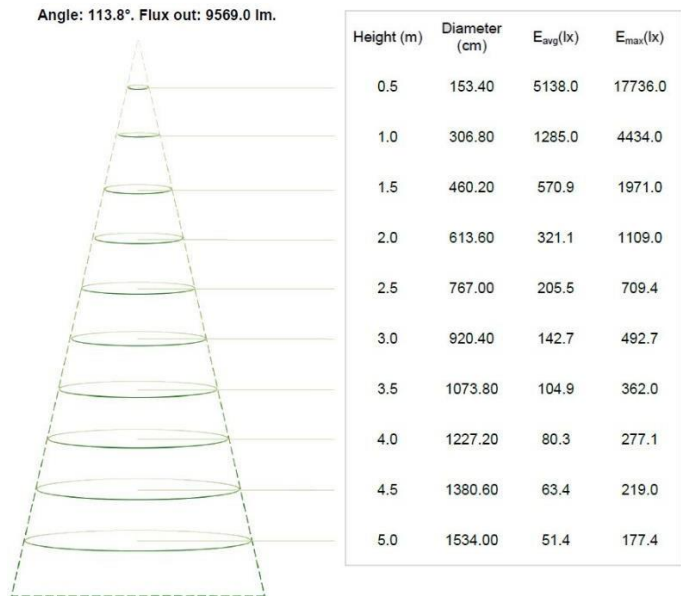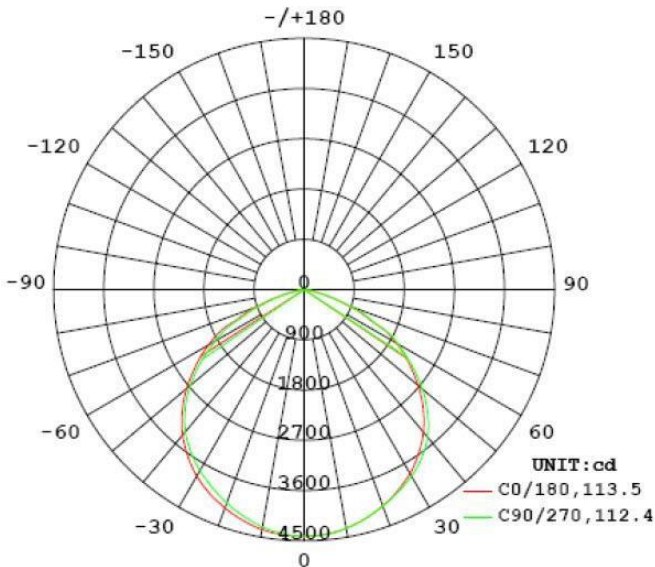

150W

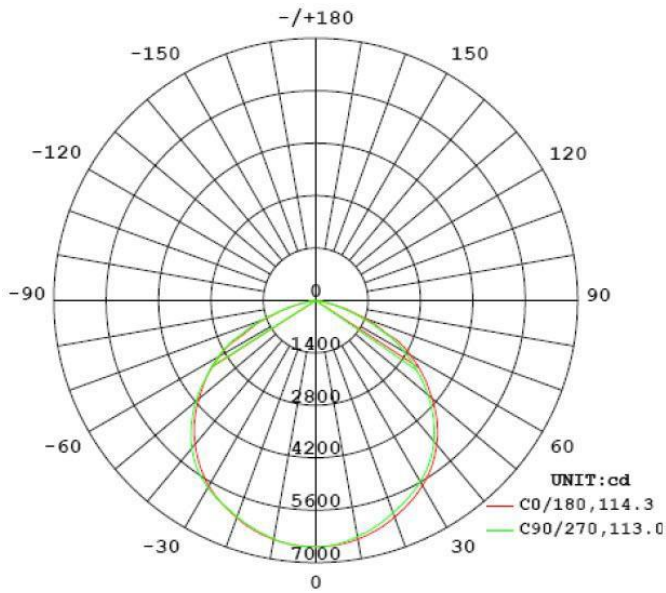


Angle: 114.2°. Flux out: 14569.0 lm.

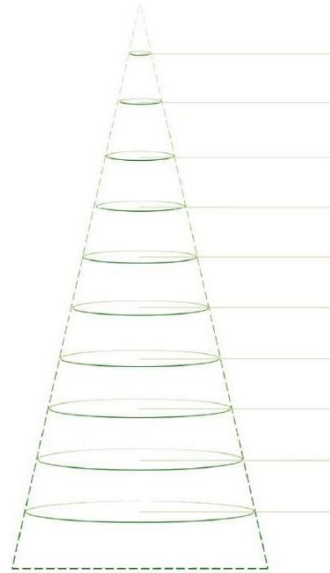


Height (m)	Diameter (cm)	E _{avg} (lx)	E _{max} (lx)
0.5	154.58	7243.0	26366.0
1.0	309.15	1811.0	6591.0
1.5	463.73	804.8	2930.0
2.0	618.31	452.7	1648.0
2.5	772.88	289.7	1055.0
3.0	927.46	201.2	732.4
3.5	1082.04	147.8	538.1
4.0	1236.61	113.2	412.0
4.5	1391.19	89.4	325.5
5.0	1545.76	72.4	263.7

200W

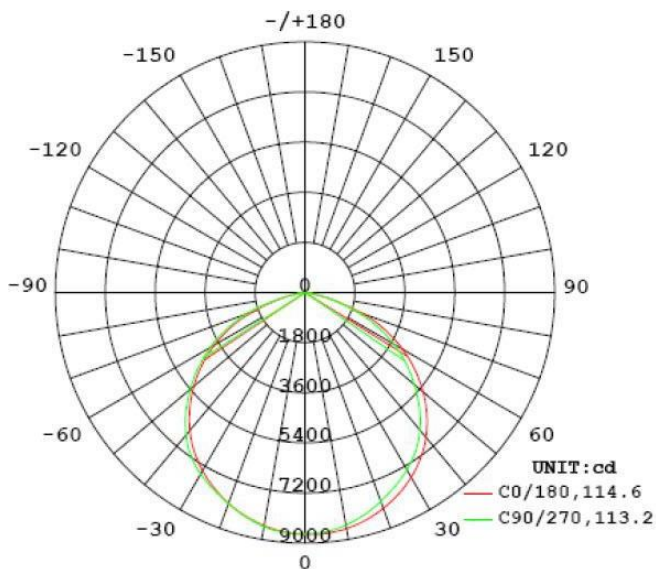

Angle: 113.8°. Flux out: 18725.0 lm.

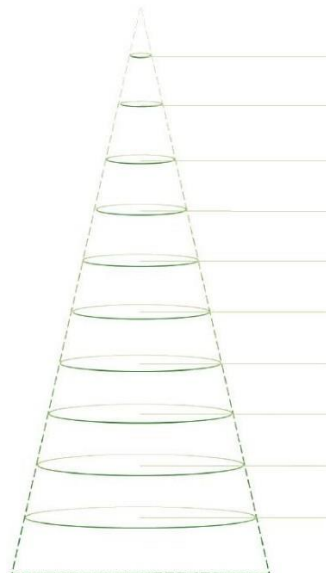

Height (m)	Diameter (cm)	E _{avg} (lx)	E _{max} (lx)
0.5	153.40	10055.0	34969.0
1.0	306.80	2514.0	8742.0
1.5	460.20	1117.0	3885.0
2.0	613.60	628.4	2186.0
2.5	767.00	402.2	1399.0
3.0	920.40	279.3	971.4
3.5	1073.80	205.2	713.6
4.0	1227.20	157.1	546.4
4.5	1380.60	124.1	431.7
5.0	1534.00	100.5	349.7