



Date: _____ Location: _____
 Product: _____ Project: _____
 Quantity: _____ Catalog #: _____



40W or 60W



90W or 120W

CONSTRUCTION:

Heavy duty die-cast aluminum housing. High quality tempered glass optics. Polyester powder-coated finish. Stabilized to extreme climate changes without cracking or peeling.

OPTICAL SYSTEM:

Philips Lumileds 3030 LED chips. 70° x 135° beam angle. High quality tempered glass optics.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

LED Modular Wall Pack Light Series

FEATURES

- IP65 rated
- Rust and corrosion proof
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Area lighting
- Parking decks
- Auto dealerships
- High masts
- Housing complexes
- Shopping malls
- Sporting complexes
- Parks and Recreational areas
- Municipal lots

ELECTRICAL:

Available as 120-277V input. -30°C to 45°C, -22°F to 113°F

INSTALLATION & MOUNTING:

Wall mount.

DIMMING:

Non-dimming.




MODEL NUMBER – 5,000K	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
GT-MSL-WP40W-50K	40W	5,418.86LM	144.97LM/W	72.6	0.9	7.48%	100W HID
GT-MSL-WP60W-50K	60W	6,806.42LM	126.51LM/W	73.2	0.943	4.84%	150W HID
GT-MSL-WP90W-50K	90W	13,050LM	145LM/W	70	0.95	15%	200W HID
GT-MSL-WP120W-50K	120W	15,000LM	125LM/W	70	0.9	20%	250W HID


LED Modular Wall Pack Light Series

Series	Wattage	Color Temperature
GT-MSL-WP	40W 60W 90W 120W	5000K

MEASUREMENTS

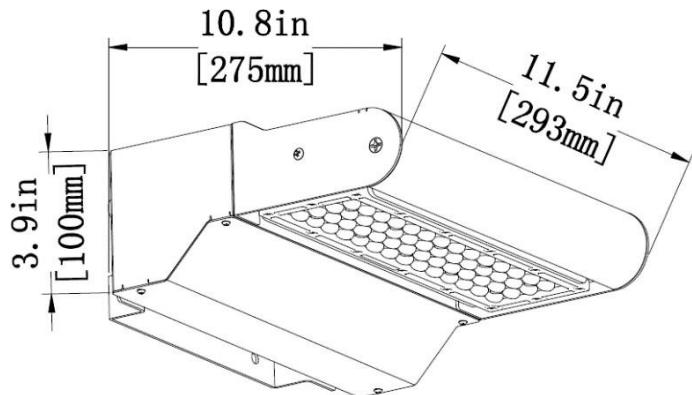

40W or 60W

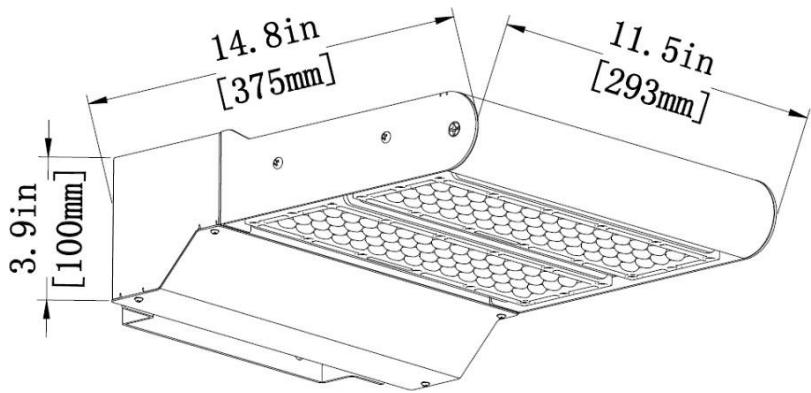

90W or 120W

MODEL	QUANTITY	WEIGHT	UPC CODE
GT-MSL-WP40W-50K	1	8.82 lbs	00815586028474
GT-MSL-WP60W-50K	1	8.82 lbs	00815586028481
GT-MSL-WP90W-50K	1	11.02 lbs	00815586028498
GT-MSL-WP120W-50K	1	11.02 lbs	00815586028504