



Date: \_\_\_\_\_ Location: \_\_\_\_\_

Product: \_\_\_\_\_ Project: \_\_\_\_\_

Quantity: \_\_\_\_\_ Catalog #: \_\_\_\_\_

## LED GT-2FTSL-347-22W Multi CCT Strip Light

### FEATURES



- Default CCT: 5,000K
- IP20 rated
- V-Hook included
- DC 12V auxiliary
- 50,000 hours lifetime

### SUITABLE APPLICATIONS

- Parking Lot
- Supermarket
- Corridor
- Retail Spaces
- Warehouses

#### CONSTRUCTION:

22-gauge metal housing with matte white paint. PMMA cover lens. Frosted lens.

#### OPTICAL SYSTEM:

Seoul 2835 LED chips. High quality tempered glass optics. 120° beam angle.

#### WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

#### ELECTRICAL:

Available as 120-347V input. -20°C to 50°C, -4°F to 122°F

#### INSTALLATION & MOUNTING:

Suspension or surface mount option.

#### CONTROLS & DIMMING:


0-10V dimming comes standard.



MODEL NUMBER – 3,500K 4,000K 5,000K	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
GT-2FTSL-347-22WMCCT(35/40/50)DF	22W	2,877.6LM	128.88LM/W	84.3	0.9358	13.07%	100W


Series	Size	Voltage	Wattage	Color Temperature	Dimming
GT-SL	2FT = 2 foot	120-347V	22W	3500K 4000K 5000K	Dimmable

## MEASUREMENTS

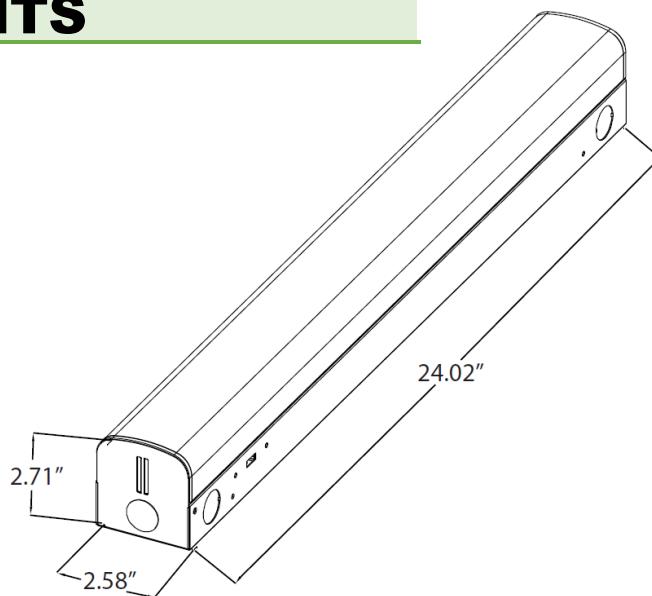

MODEL	QUANTITY	WEIGHT	UPC CODE
GT-2FTSL-347-22WMCCT(35/40/50)DF	1	lbs	00810050940535

## OPTIONAL ACCESSORIES



V-Hook (included)



Aircraft Cable



Sensor




Emergency Back-up

Remote Control  
GT-RC-100


## PHOTOMETRIC DATA




3,500K

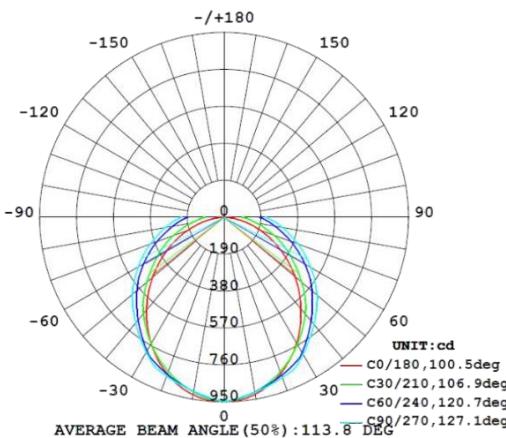


4,000K

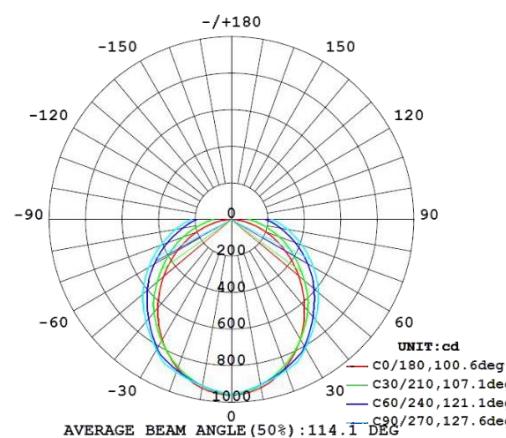


5,000K

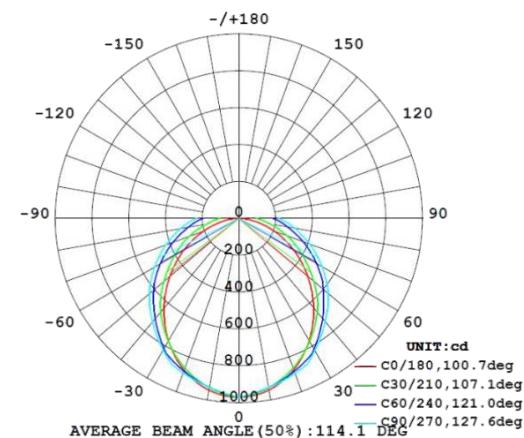

3,500K

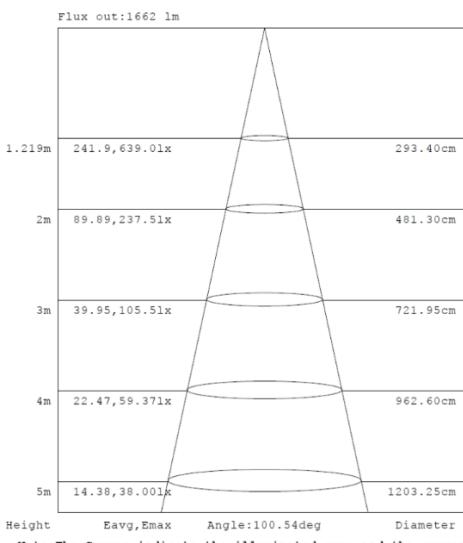

4,000K

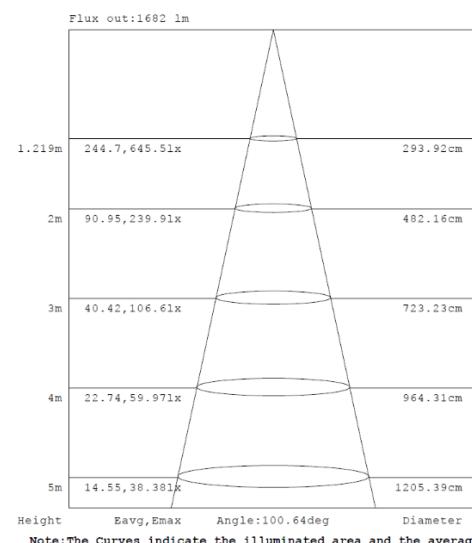

5,000K

