



Date: _____ Location: _____

Product: _____ Project: _____

Quantity: _____ Catalog #: _____

LED Multi Watt Multi CCT Vapor Tight



FEATURES

- Default Wattage is the highest wattage
 - 2FT – 30W
 - 4FT – 50W
 - 8FT – 90W
- Default CCT: 5,000K
- IK10 & IP66 rating
- Glare-free / flicker-free lighting
- Linkable design (see page 2 for details)
- 100,000 hours lifetime

SUITABLE APPLICATIONS

- Warehouses
- Schools
- Factories
- Offices
- Supermarkets
- Logistic Centers
- Exhibition Halls

CONSTRUCTION:

PC housing and white cover with stainless steel clips.

OPTICAL SYSTEM:

Lumiled 2835 LED chips. 110° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

120-277V input standard.
-20°C to 40°C, -4°F to 104°F

INSTALLATION & MOUNTING:

Surface mount or suspension mount.

CONTROLS & DIMMING:

0-10V dimming comes standard. Suitable for use with LED dimmers. Auxiliary 12V output.




MODEL NUMBER	SIZE	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
GT-2FTVT-MW(20/25/30)MCCT(35/40/50)	2FT	20W	2,738.2LM	136.91LM/W	81.7	0.9049	15.76%	2 17W LED tube
GT-2FTVT-MW(20/25/30)MCCT(35/40/50)	2FT	25W	3,422.75LM	136.91LM/W	81.7	0.9049	15.76%	2 17W LED tube
GT-2FTVT-MW(20/25/30)MCCT(35/40/50)	2FT	30W	4,086.6LM	136.91LM/W	81.7	0.9049	15.76%	2 32W LED tube
GT-4FTVT-MW(25/35/50)MCCT(35/40/50)	4FT	25W	3,395.75LM	135.83LM/W	81.7	0.9154	9.68%	2 17W LED tube
GT-4FTVT-MW(25/35/50)MCCT(35/40/50)	4FT	35W	4,754.05LM	135.83LM/W	81.7	0.9154	9.68%	2 17W LED tube
GT-4FTVT-MW(25/35/50)MCCT(35/40/50)	4FT	50W	6,775.3LM	135.83LM/W	81.7	0.9154	9.68%	2 32W LED tube
GT-8FTVT-MW(60/75/90)MCCT(35/40/50)	8FT	60W	8,340LM	135.5LM/W	80	0.9	15%	2 32W LED tube
GT-8FTVT-MW(60/75/90)MCCT(35/40/50)	8FT	75W	10,162.5LM	135.5LM/W	80	0.9	15%	4 32W or 2 59W LED tube
GT-8FTVT-MW(60/75/90)MCCT(35/40/50)	8FT	90W	12,870LM	135.5LM/W	80	0.9	15%	4 32W or 2 59W LED tube

LED Multi Watt Multi CCT Vapor Tight



Series	Size	2FT Wattage	4FT Wattage	8FT Wattage	Color Temperature
GT-2FTVT	2FT	20W	25W	60W	3500K
GT-4FTVT	4FT	25W	35W	75W	4000K
GT-8FTVT	8FT	30W	50W	90W	5000K

MEASUREMENTS


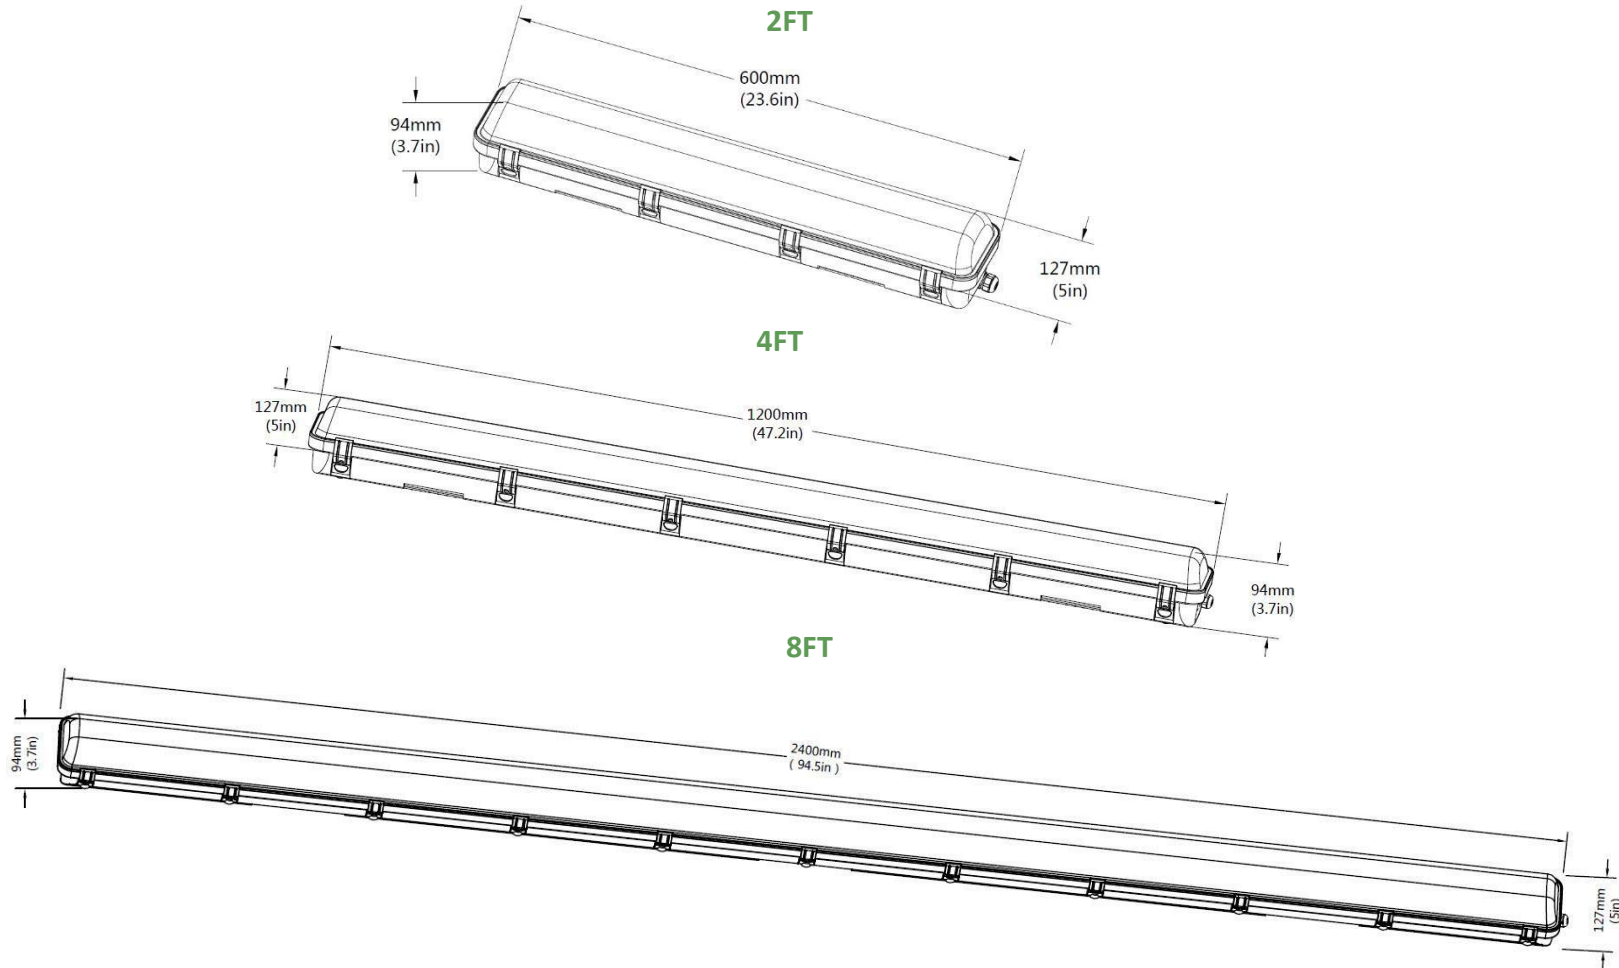


MODEL	QUANTITY	WEIGHT	UPC CODE
GT-2FTVT-MW(20/25/30)MCCT(35/40/50)	1	lbs	00815586029716
GT-4FTVT-MW(25/35/50)MCCT(35/40/50)	1	lbs	00815586029709
GT-8FTVT-MW(60/75/90)MCCT(35/40/50)	1	lbs	00815586029723

LINKING TOGETHER



Model Number	Voltage (18AWG)	Linkable Qty	Voltage (16AWG)	Linkable Qty
GT-2FTVT-MW(20/25/30)MCCT(35/40/50)	120V	30	120V	45
	240V	60	240V	90
	277V	70	277V	110
GT-4FTVT-MW(25/35/50)MCCT(35/40/50)	120V	18	120V	25
	240V	35	240V	50
	277V	40	277V	60
GT-8FTVT-MW(60/75/90)MCCT(35/40/50)	120V	10	120V	15
	240V	21	240V	30
	277V	24	277V	35

2FT 20W

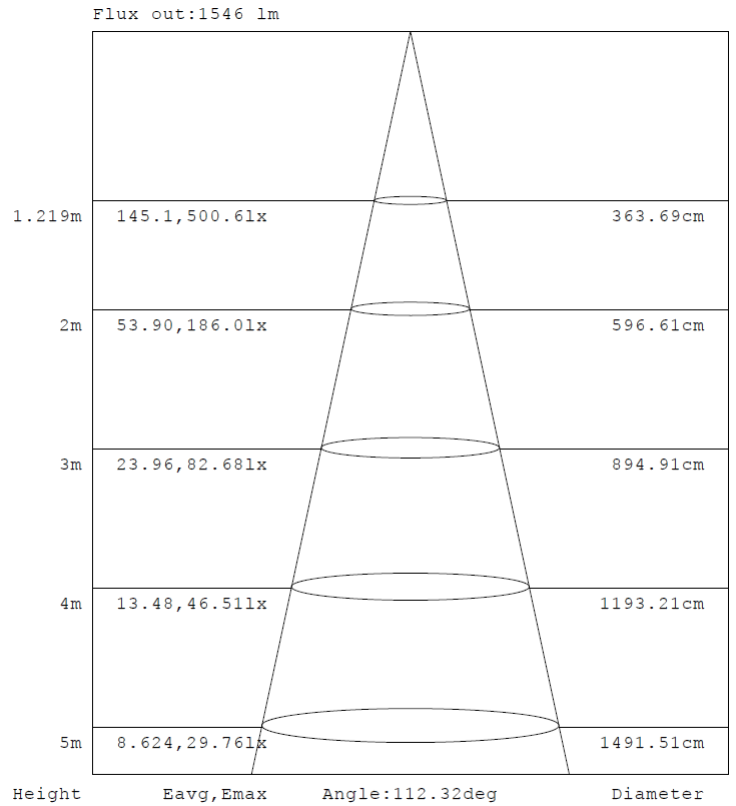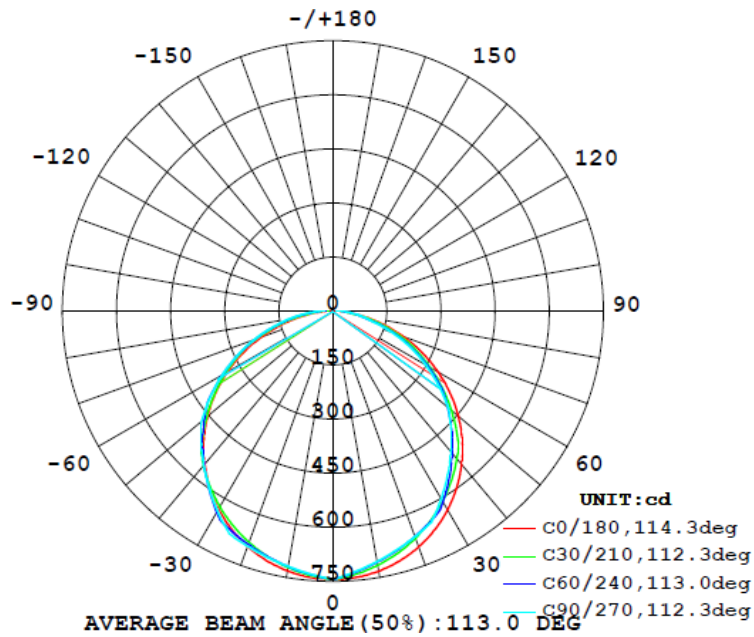

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

2FT 25W

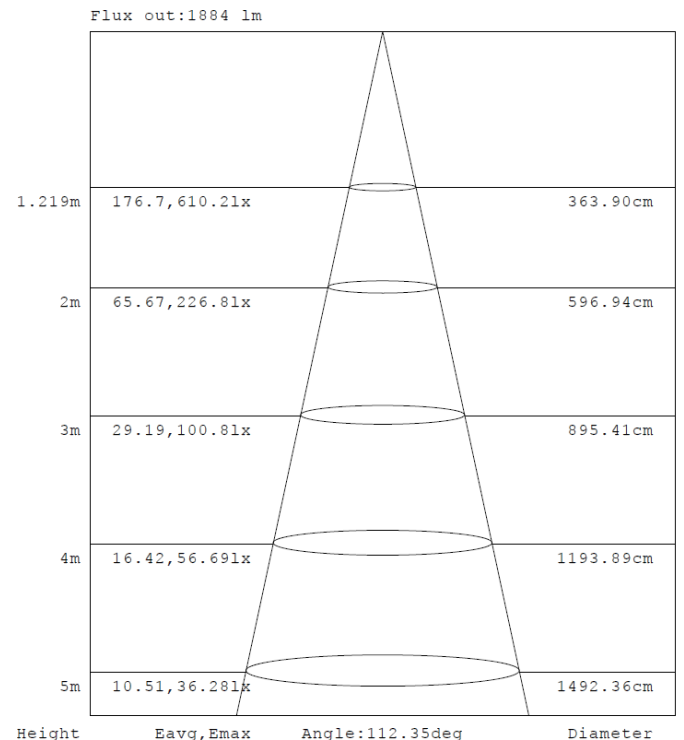
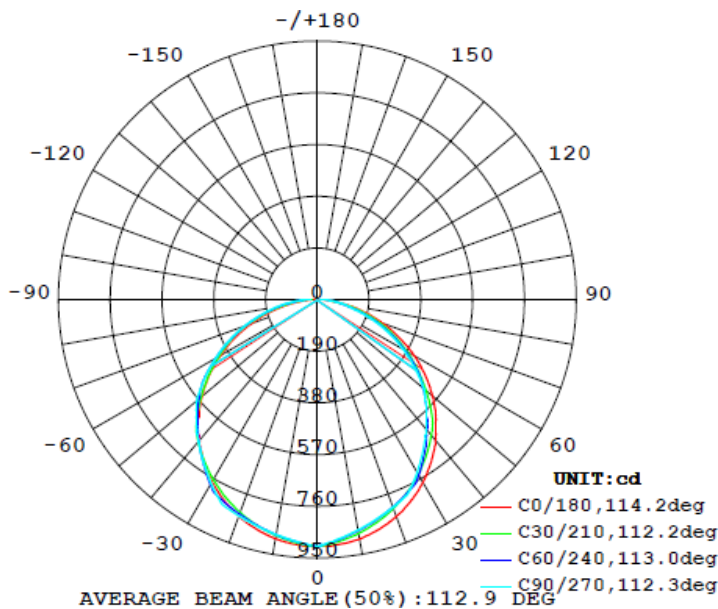


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

PHOTOMETRIC DATA





2FT 30W

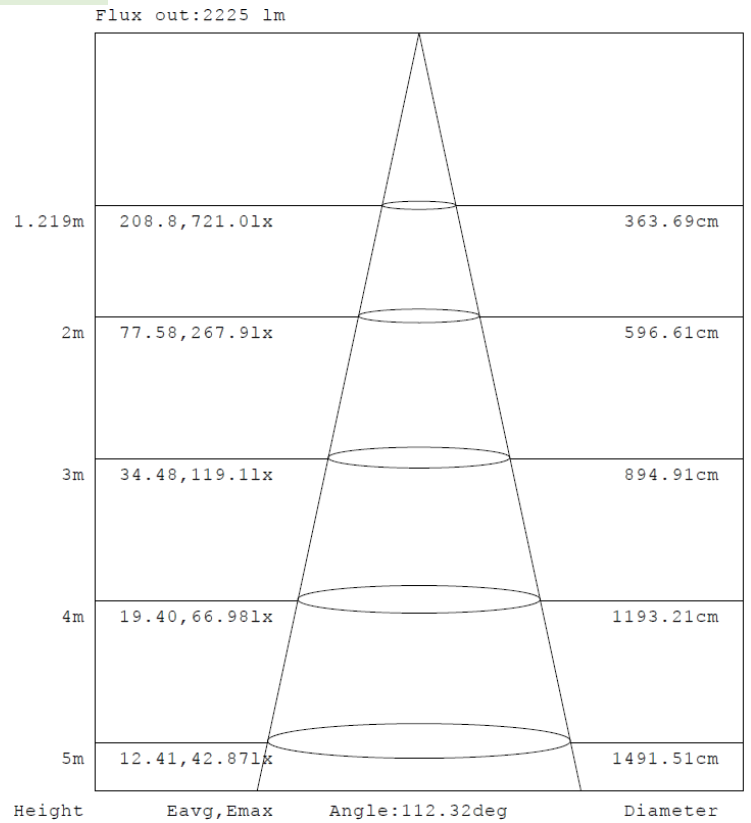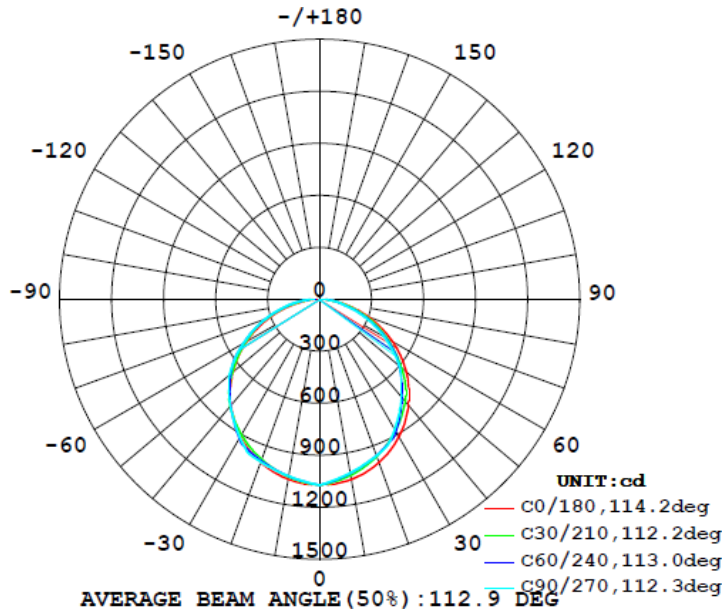



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

4FT 25W

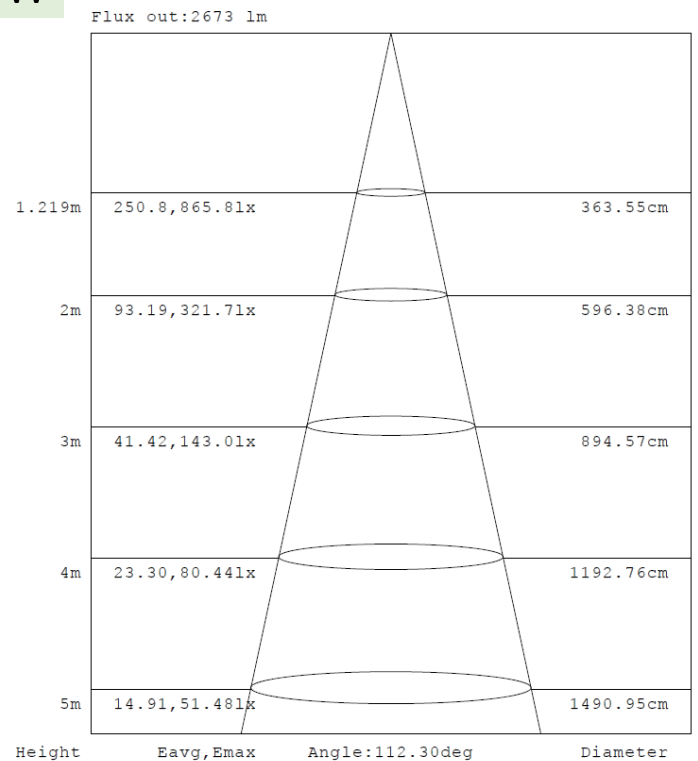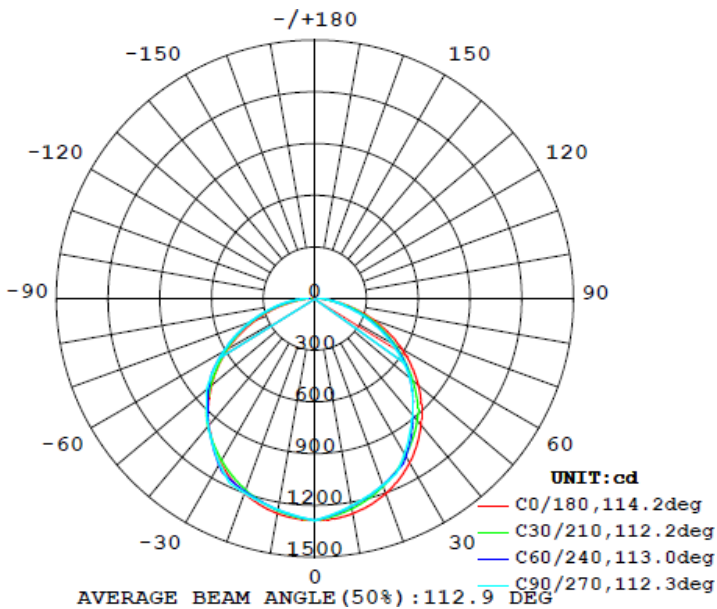



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

4FT 35W

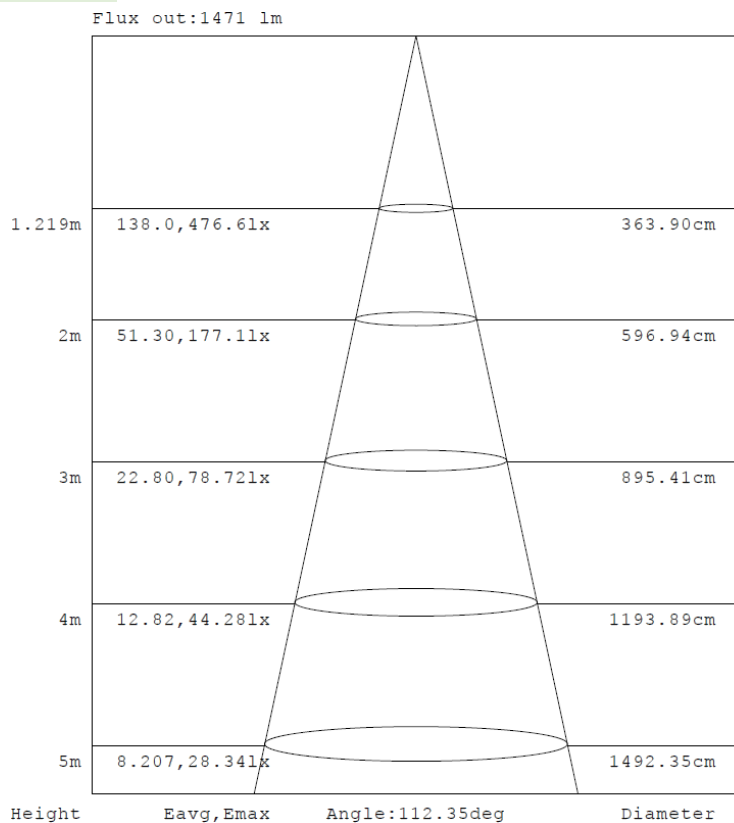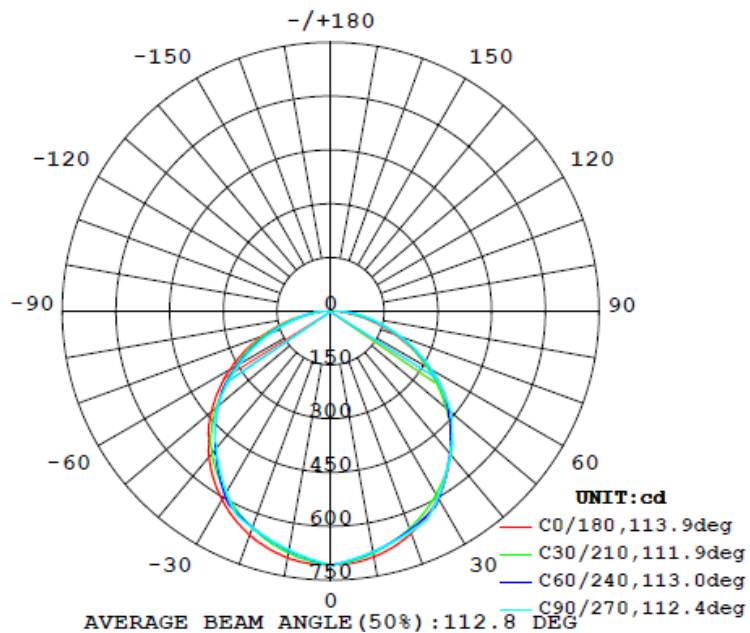



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

4FT 50W

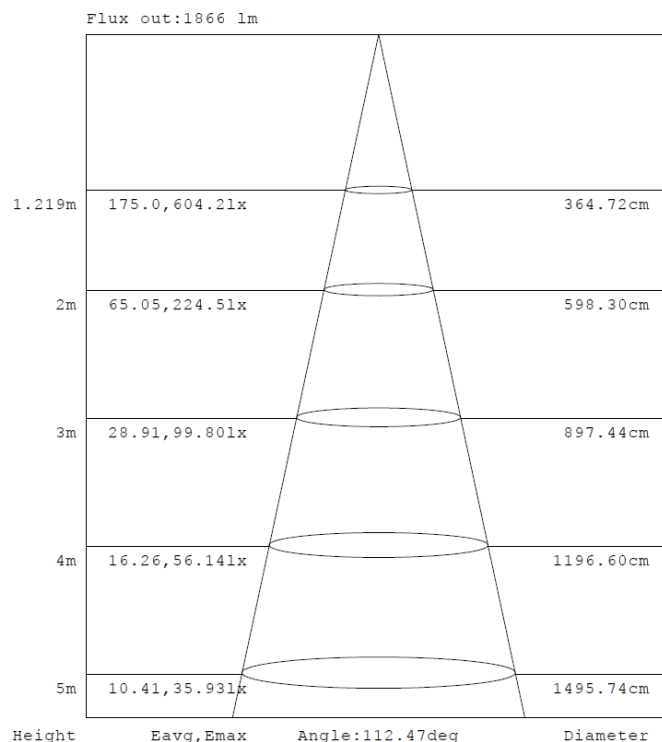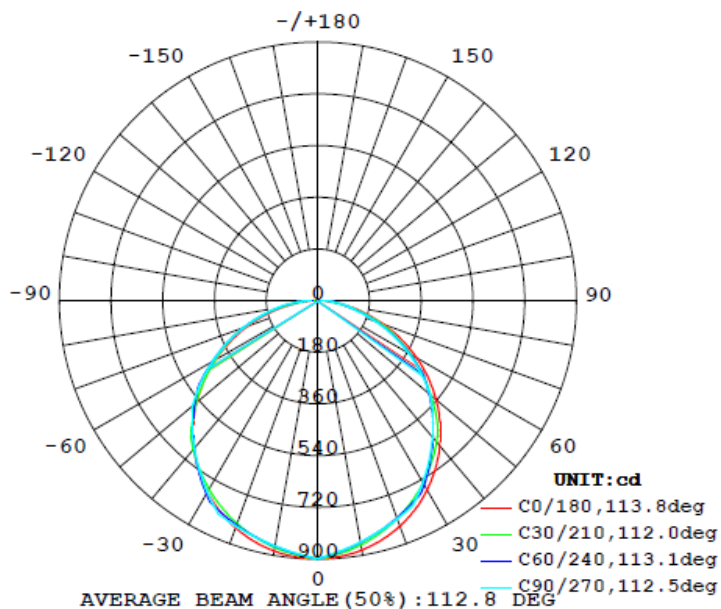



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

8FT 60W

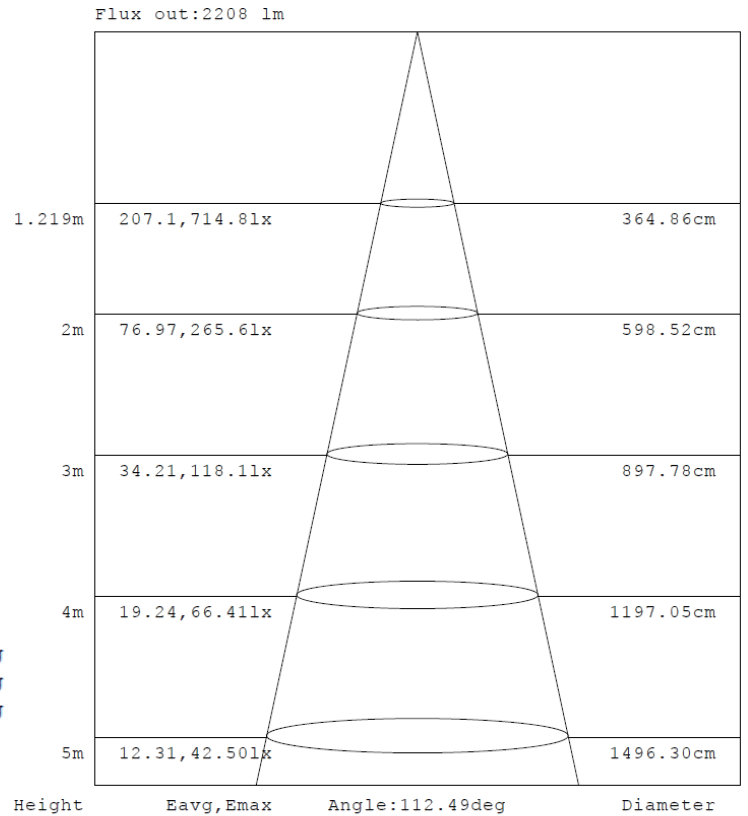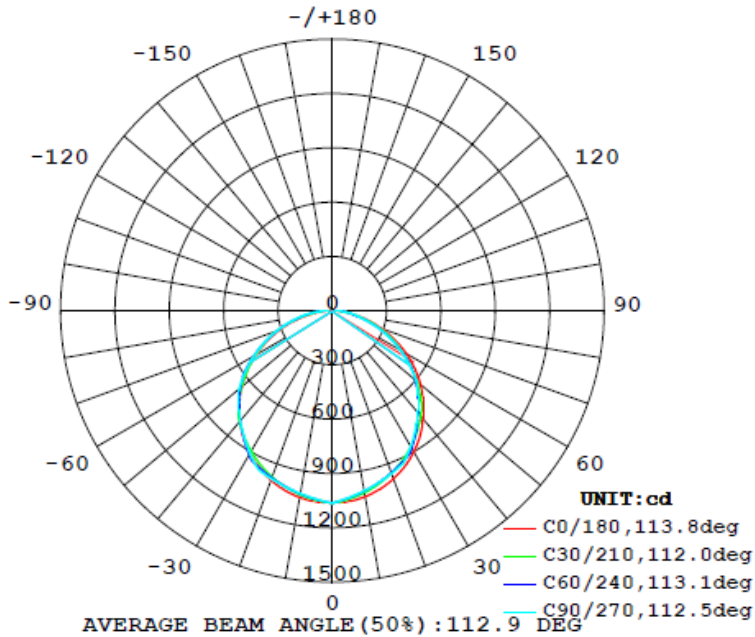

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

8FT 75W

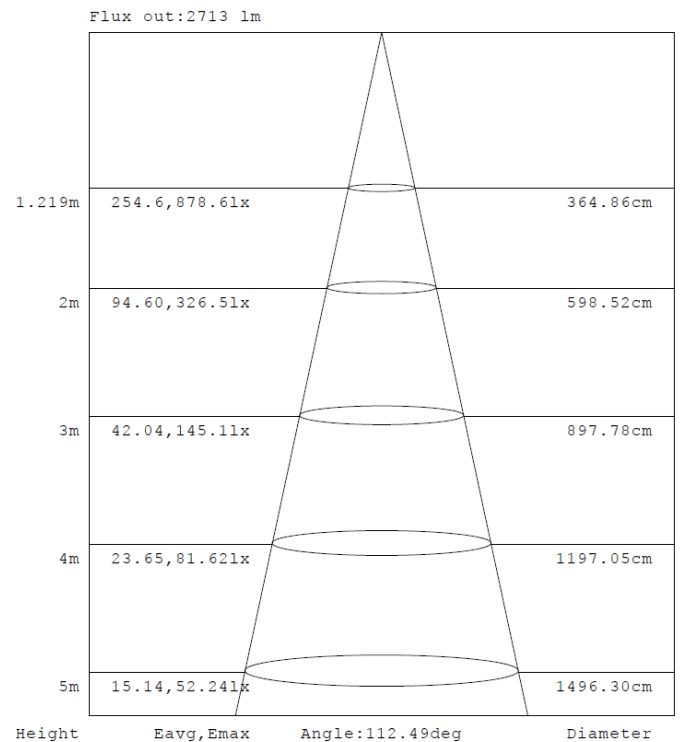
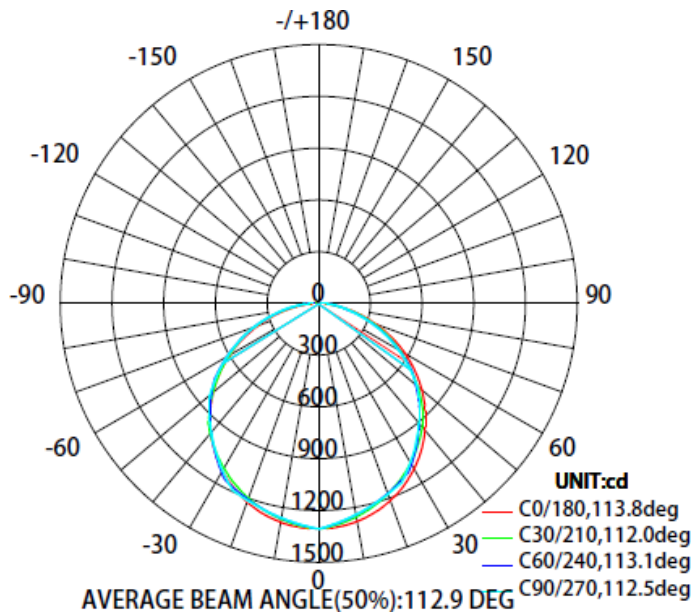


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

PHOTOMETRIC DATA



8FT 90W

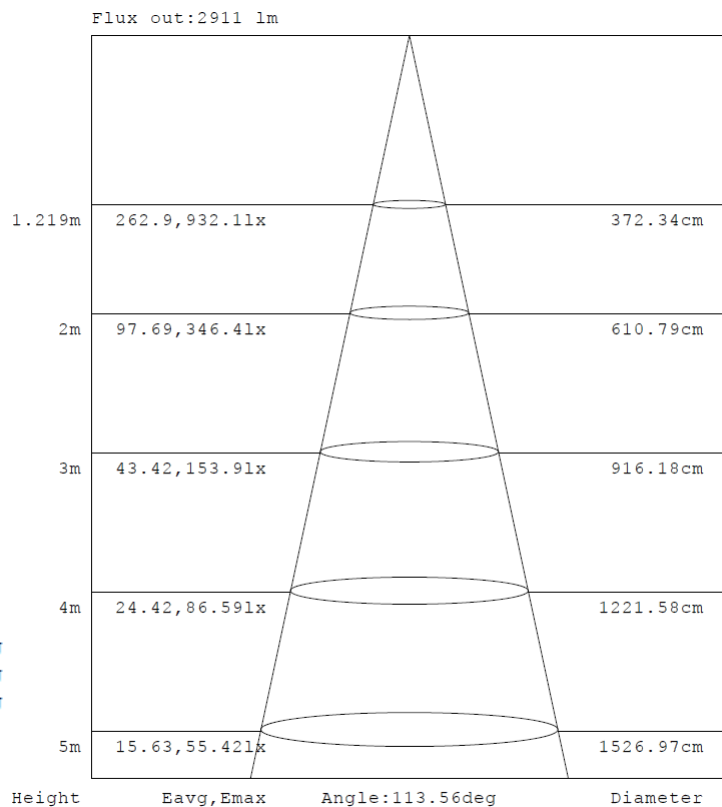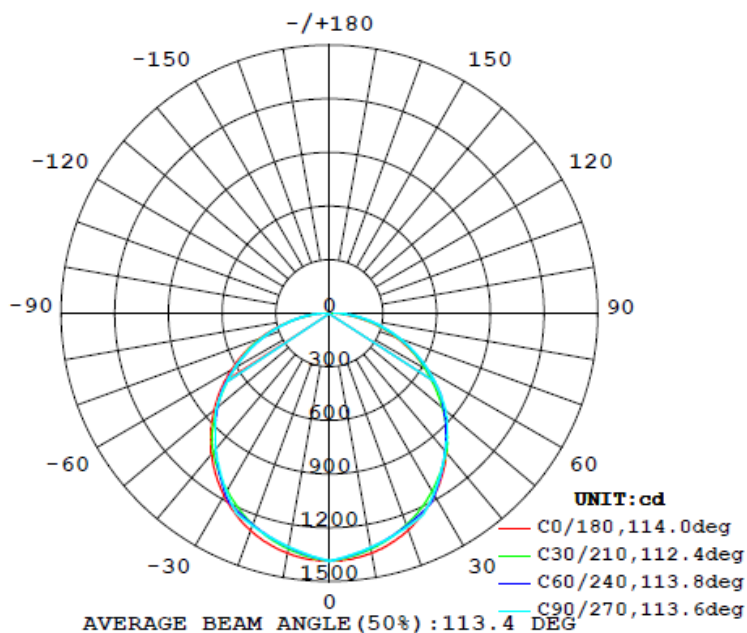

MOUNTING OPTIONS

Surface Mount



Suspension Kit
(not included)



OPTIONAL ACCESSORIES



Emergency Back-up



Sensor



Remote Control
GT-RC-100