



Date: _____ Location: _____
 Product: _____ Project: _____
 Quantity: _____ Catalog #: _____

LED Adjustable Wall Pack Series



30W & 50W



75W & 100W

FEATURES

- IP65 rated
- Easy installation and maintenance
- Corrosion and rust proof
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Residential Complexes
- Parking Decks
- Shopping Malls
- Sporting Complexes
- Logistic Centers
- Auto dealerships
- Municipal Lots

Special Order:

- Other CCTs

CONSTRUCTION:

Heavy die-cast aluminum housing with polyester powder-coated finish. Integral secondary heat sink to optimize thermal transfer and maximize performance of the LEDs.

OPTICAL SYSTEM:

Philips Lumiled 3030 LED chips. High quality tempered glass optics. 100° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -20°C to 50°C, -4°F to 122°F

INSTALLATION & MOUNTING:

Wall mount.

CONTROLS & DIMMING:

0-10V dimming comes standard.




MODEL NUMBER – 5,000K	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
GT-AWP-30W-50K-LV-V12	30W	3,450LM	115LM/W	70	0.91	11.4%	100W
GT-AWP-50W-50K-LV-V12	50W	4,680LM	117LM/W	70	0.96	9.7%	100W
GT-AWP-75W-50K-LV-V12	75W	9,000LM	120LM/W	70	0.96	13.8%	150W
GT-AWP-100W-50K-LV-V12	100W	12,000LM	120LM/W	70	0.94	12.8%	200W


LED Adjustable Wall Pack Series

Series	Wattage	Color Temperature	Voltage
GT-AWP	30W 50W 75W 100W	5000K	LV = 120-277V

MEASUREMENTS

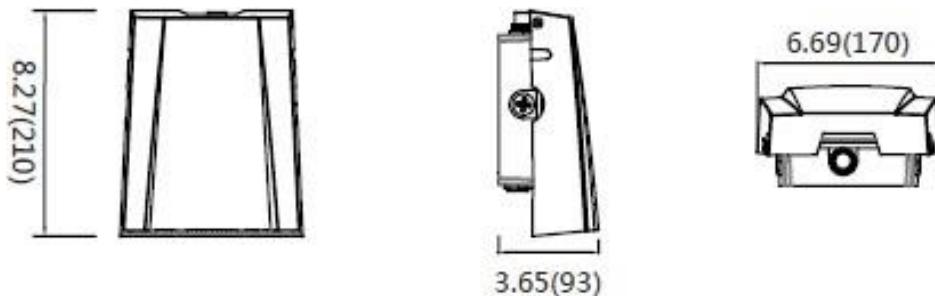

30W & 50W

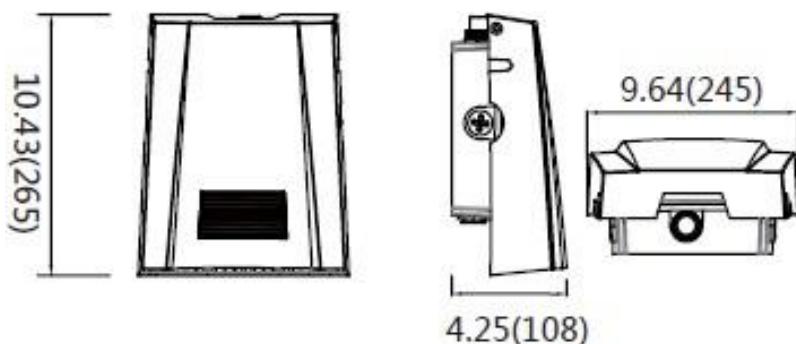


75W & 100W


MODEL	QUANTITY	WEIGHT	UPC CODE
GT-AWP-30W-50K-LV-V12	1	lbs	00810050940252
GT-AWP-50W-50K-LV-V12	1	lbs	00810050940269
GT-AWP-75W-50K-LV-V12	1	lbs	00810050940276
GT-AWP-100W-50K-LV-V12	1	lbs	00810050940280

PHOTOMETRIC DATA

30W

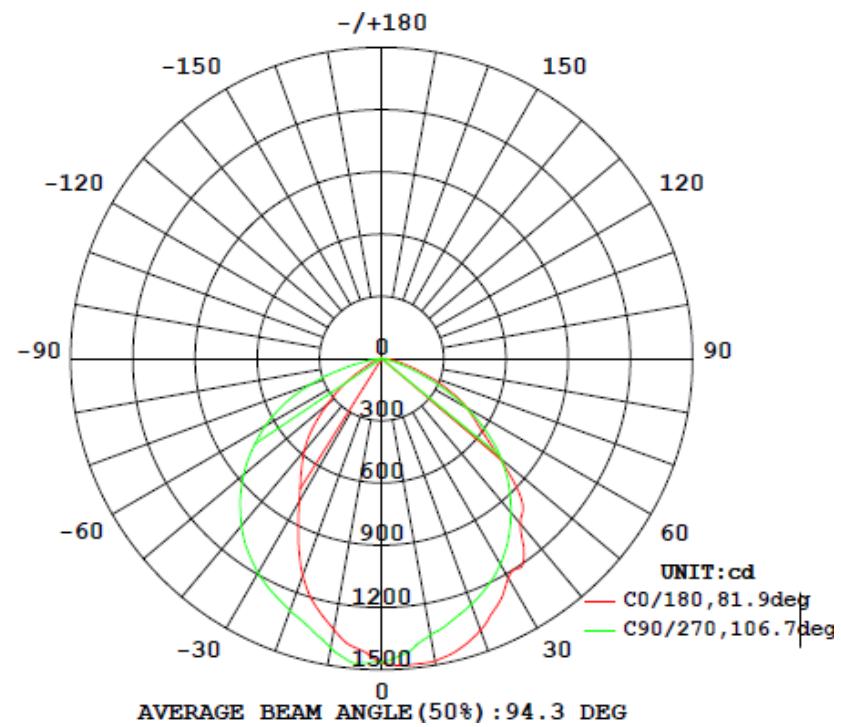


50W

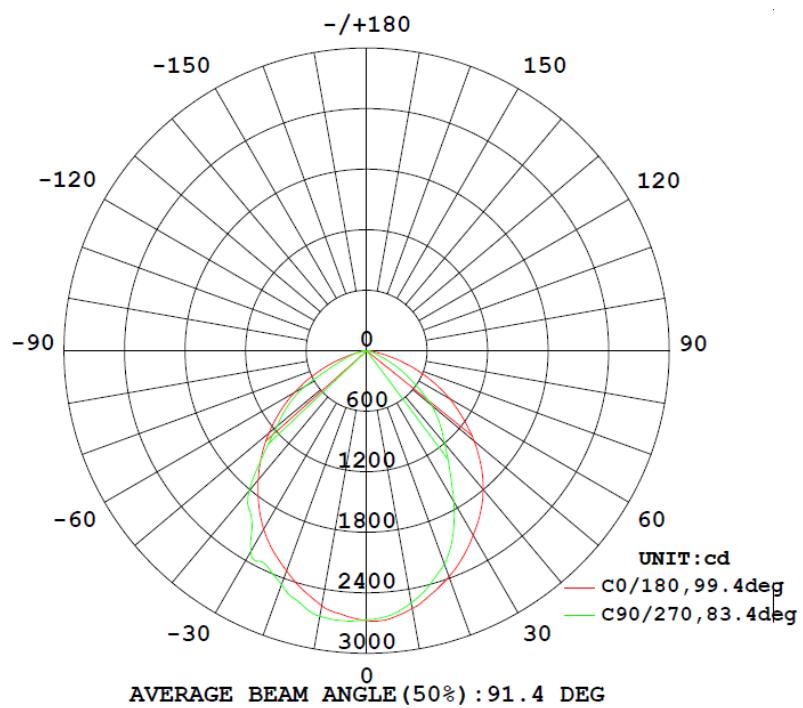

PHOTOMETRIC DATA

75W

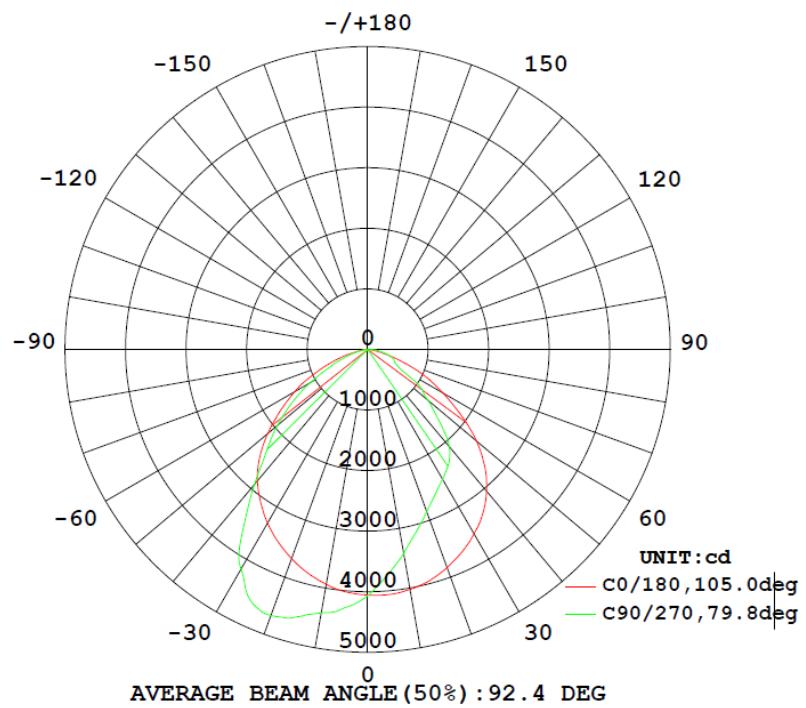

100W

