



Date: _____ Location: _____

Product: _____ Project: _____

Quantity: _____ Catalog #: _____

LED Wrap Around Light Series



2 Foot



4 Foot

FEATURES

- IP20 rated
- ABS endcaps design for easy install/removal of lens
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Parking Lots
- Supermarkets
- Corridors
- Retail Spaces
- Warehouses

CONSTRUCTION:

22-gauge metal housing with matte white finish. PMMA cover lens.

OPTICAL SYSTEM:

Samsung 2835 LED chips. Frosted lens. 110° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 100-277V input. -20°C to 50°C, -4°F to 122°F

INSTALLATION & MOUNTING:

Suspension or surface mounting options.

Metal joiner bracket:

- 2 foot can link up to 20 pieces
- 4 foot can link up to 10 pieces

CONTROLS & DIMMING:


0-10V dimming comes standard.



MODEL NUMBER	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
GT-2FTWA-23W50KD	23W	3,026.8LM	131.6LM/W	80	0.9	20%	
GT-4FTWA-34W50KD	34W	4,549.2LM	133.8LM/W	80	0.9	20%	

Series	2 FOOT	4 FOOT	Color Temperature	Controls
GT-WA	23W	34W	5000K	D = 0-10V Dimming

MEASUREMENTS

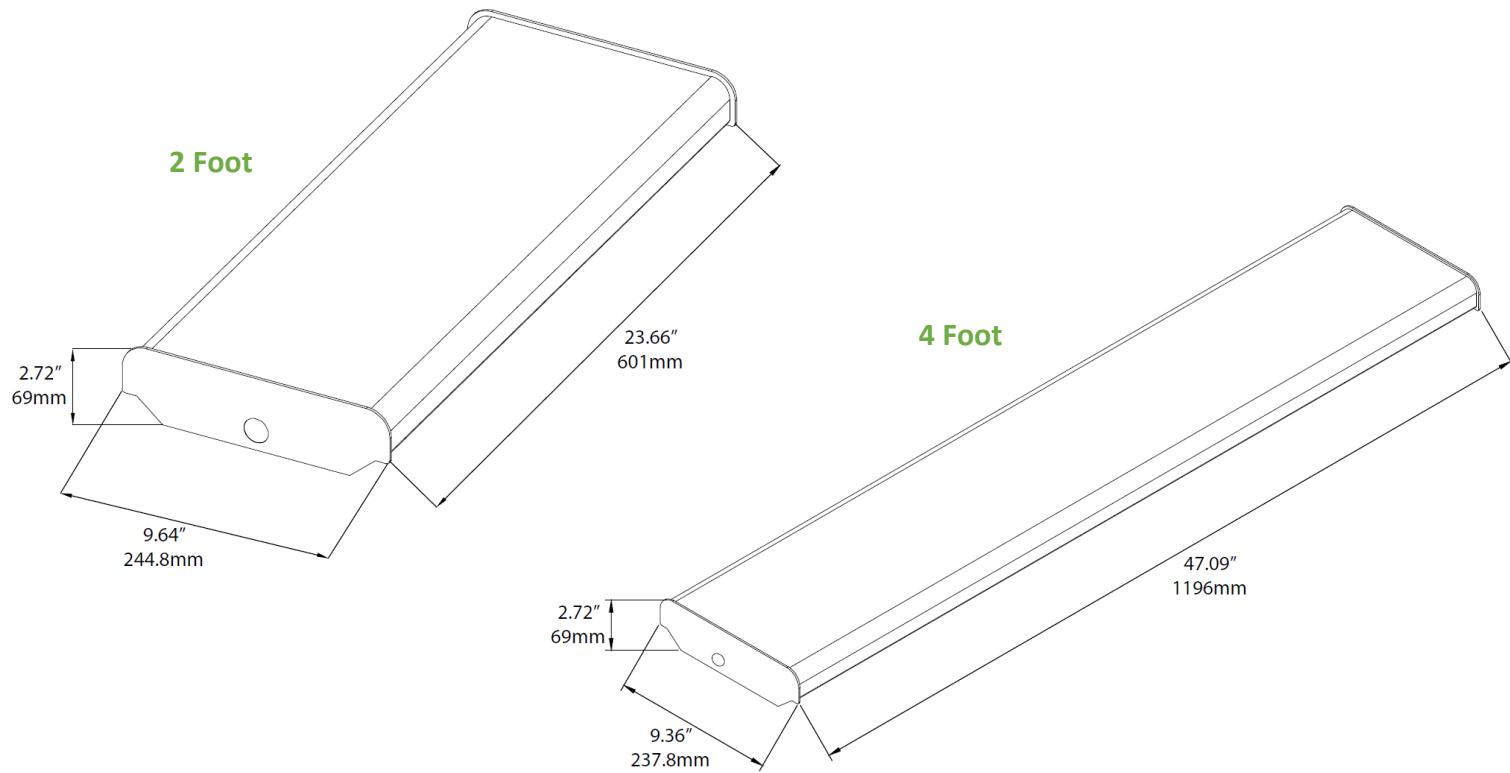

MODEL	QUANTITY	WEIGHT	UPC CODE
GT-2FTWA-23W50KD	1	lbs	00810050940412
GT-4FTWA-34W50KD	1	lbs	00810050940436

OPTIONAL ACCESSORIES



Emergency Battery
GT-EMDR-15W-050




Suspension Kit
(not included)




Metal Joiner Bracket
(not included)

PHOTOMETRIC DATA

2 FOOT 23W

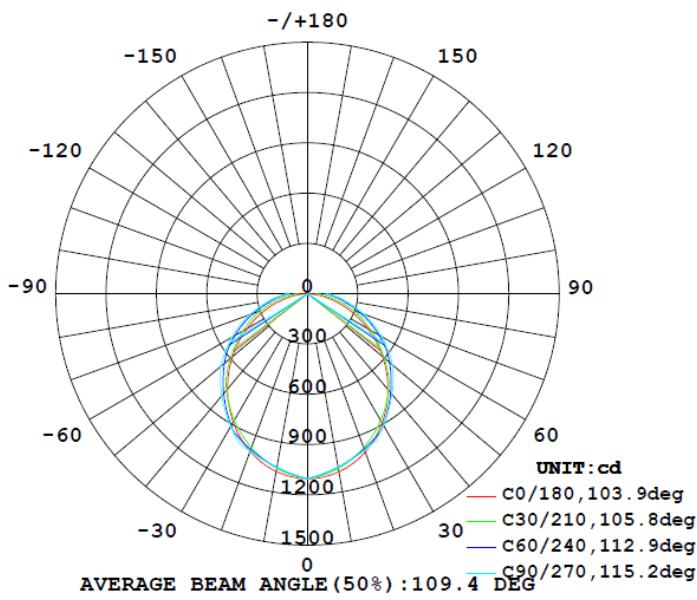


Flux out: 1982 lm

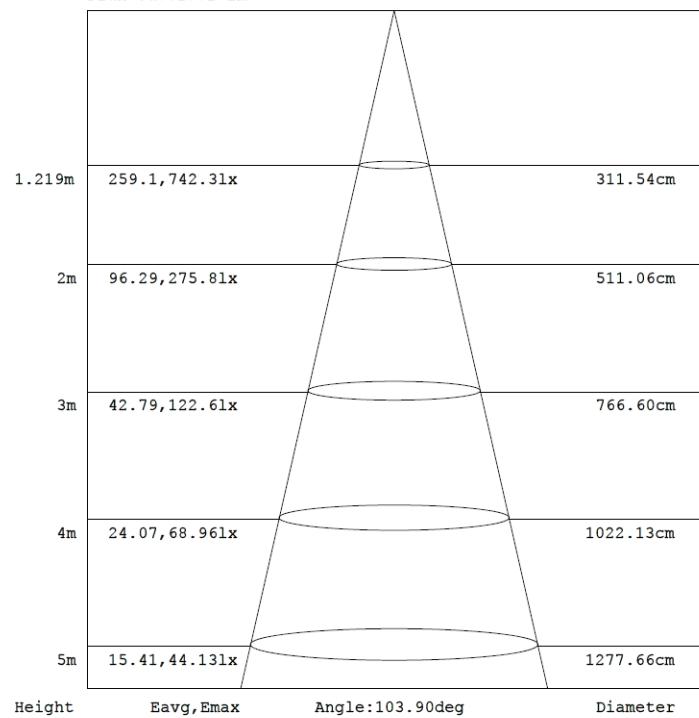


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

4 FOOT 34W

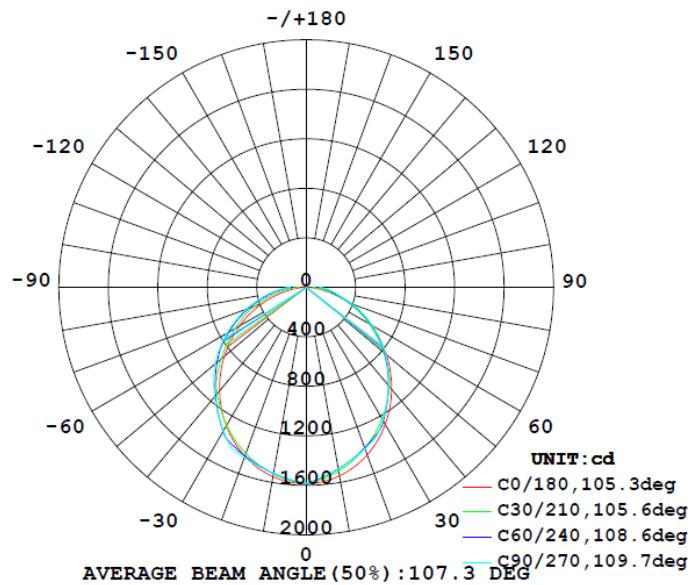

Flux out: 2895 lm

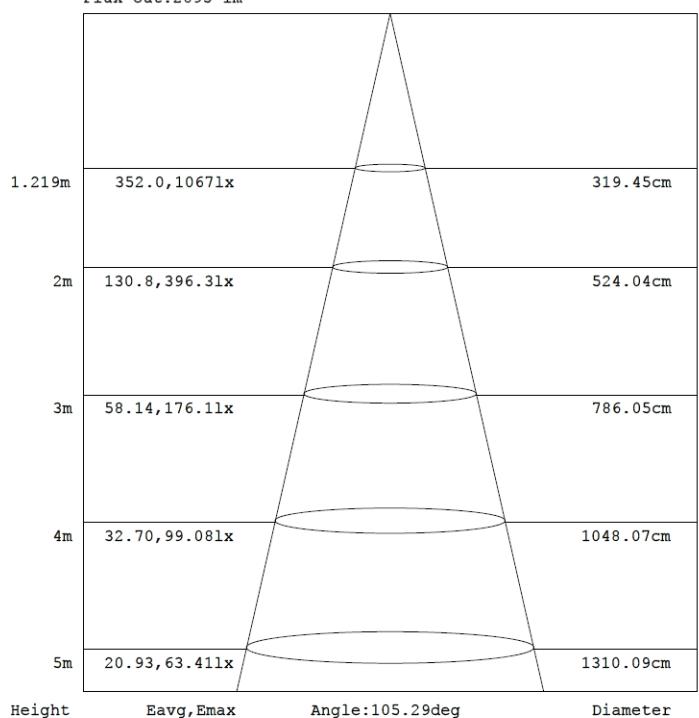

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.